


DOVA

ZHEJIANG JIAFU HVAC
CO.,LTD

DOVA

ZHEJIANG JIAFU HVAC CO.,LTD

Add: 16th Qiuyanqiao North Road Qinggang Yuhuan Zhejiang China
Tel: +86-576-8716 8136
Fax: +86-576-8710 7996
Website: www.gafo.cc
E-mail: sales@chinabilloway.com sales1@gafo.cc

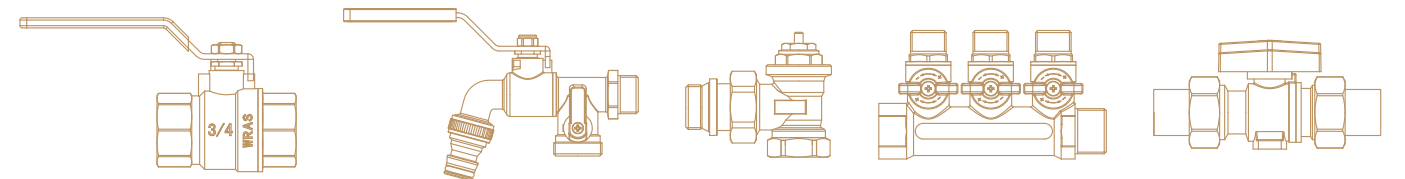

www.gafo.cc



Dare to strive
Own our progress
Value foremost
Assurance always



DOVA

ISO9001:2015 ISO14001:2015 ISO45001:2018



BRIEF INTRODUCTION

ZHEJIANG JIAFU HVAC CO.,LTD is located in Yuhuan –named valve city in China. We’re a manu-
facturer specialized in brass valves for heating and plumbing system for 22 years’ production in
this field. we have built up a good reputation by devoting ourselves to the R&D, production,
sales, service and OEM solutions since our establishment in 2004.

Our factory plant covers 17,000m² with annual capacity of more than 10 million sets of prod-
ucts, depends on 26 sets of hot-forging machines in production loading tonnage from 40 to
630 tons, and 10 sets of transfer machine, and 120 sets of CNC and multi-axis machines with
high precision and performance, and 10 assembly lines, and 150 skilled workers, including 25
QC staff,who strictly execute intensive inspections on each procedure according to standard.
Constant efforts enable us to achieve annual production capacity of 10 million valves with
timely delivery and reliable quality.


Our management system is accredited by ISO9001:2015, ISO14001:2015 and ISO45001:2018
certifications. In compliance of ISO9001:2015, ISO14001:2015 and ISO45001:2018, we have full
control of the processes from incoming material inspection, forging, machining and assem-
bling to shipment. Our valve quality is approved by international certificates, such as CE, WRAS,
ACS, etc. We owned nearly 20 R&D patents, and won the title of "high-tech enterprise" from
Zhejiang Provincial Government. 100% leakage tightness test is operated to satisfy our clients.
With the help of our in-house testing laboratory, we inspect valve quality professionally and
efficiently.



We’re thriving ourselves to upgrade our brand DOVA image at home and abroad, which stands
for “Diligent, Ongoing, Valuable, Assurance”. Backed with our best quality products and excel-
lent services, we’re aimed to be the best producer and exporter for valves and products of fluid
control in China.

铜棒标准对照表



The comparison list of copper rod standard

企标Corporation Standard											国外标准Overseas Standard										
牌号 Models	元素值% Element Value%										牌号 Models	元素值% Element Value%									
	铜Cu	铅Pb	铝Al	铁Fe	锰Mn	镍Ni	锡Sn	砷As	锌Zn	杂质 Impurity		铜Cu	铅Pb	铝Al	铁Fe	锰Mn	镍Ni	锡Sn	砷As	锌Zn	杂质 Impurity
HPb58-3	57-59	2.5-3.5	0.4	0.5					余量 rest	2.0	日本 C3603 Japan	57-61	1.8-3.7		0.35				余量 rest	Fe+Sn ≤0.6	
HPb59-3	57.5- 59.5	2.0-3.0		0.5		0.5			余量 rest	1.0	日本 C3604 Japan	57-61	1.8-3.7		0.5				余量 rest	Fe+Sn ≤1.2	
HPb59-1	57-60	0.8-1.9	0.2	0.5					余量 rest	1.0	日本 C3605 Japan	56-60	3.5-4.5		0.5				余量 rest	Fe+Sn ≤1.2	
H57-3	57-59	2.5-3.0		1.0					余量 rest	2.0	美国 America C37700	58-61	1.5-2.5		0.3				余量 rest	0.5	
59-1A	57-60	0.8-1.9							余量 rest	1.0	美国 America C37710	56.5- 60	1.0-3.0		0.3				余量 rest	0.5	
59-2A	57-59	1.5-2.5							余量 rest	1.0	欧标 CW614N	57-59	2.5-3.5		0.3		0.3		余量 rest	0.2	
59-1B	57-60	0.8-2.5							余量 rest	2.0	欧标 CW617N	57-59	1.6-2.2	0.05	0.3		0.1	0.3	余量 rest	0.2	
60-3	60-61	2.0-3.0							余量 rest	2.0	欧标 CW510L	57-59	0.1	0.05	0.3		0.2	0.3	余量 rest	0.2	
62-1A	60-63	0.8-1.2							余量 rest	1.0	欧标 CW511L	61- 63.5	0.2	0.1	0.1	0.3			余量 rest	0.2	
											美国 America C46500	59-62	0.2		0.1		0.5- 1.0	0.02- 0.06	余量 rest		
62-2A	60-63	2.5-3.7	0.3	0.3					余量 rest		美国 America C37100	58-62	0.6-1.2		0.15				余量 rest	0.4	
砷A As A	60-63	1.7-2.8	0.05	0.2	0.1	0.2	0.2	0.08- 0.15	余量 rest	0.5	美国 America C37000	59-62	0.8-1.5		0.15				余量 rest	0.4	
											美国 America C36000	60-63	2.5-3.7		0.35				余量 rest	0.5	
砷B As B	60-63	1.7-2.8	0.5	0.5				0.08- 0.15	余量 rest	2.2	欧标 CW602N	61-63	1.7-2.8	0.05	0.1	0.1	0.3	0.1	0.02- 0.15	余量 rest	0.2
H62	60.5- 63.5	0.08		0.15		0.5			余量 rest	0.5	欧标 CZ132	61-63	1.7-2.8	0.05	0.3			0.2	0.08- 0.15		
H62-Mod	60.5- 63	1.8-2.4		0.5		0.5	1.0	0.1	余量 rest	0.5	欧标 CZ352	61-63	1.0-2.5	0.1	0.2	0.05	0.2	0.4	0.15- 0.28		
											美国 America C48600	59-62	1.0-2.5	0.1	0.2	0.05	0.3	0.12- 0.25			
											美国 America C84400	78-82	6.8-8	0.005	0.4		2.3- 3.5	0.25	7-10		


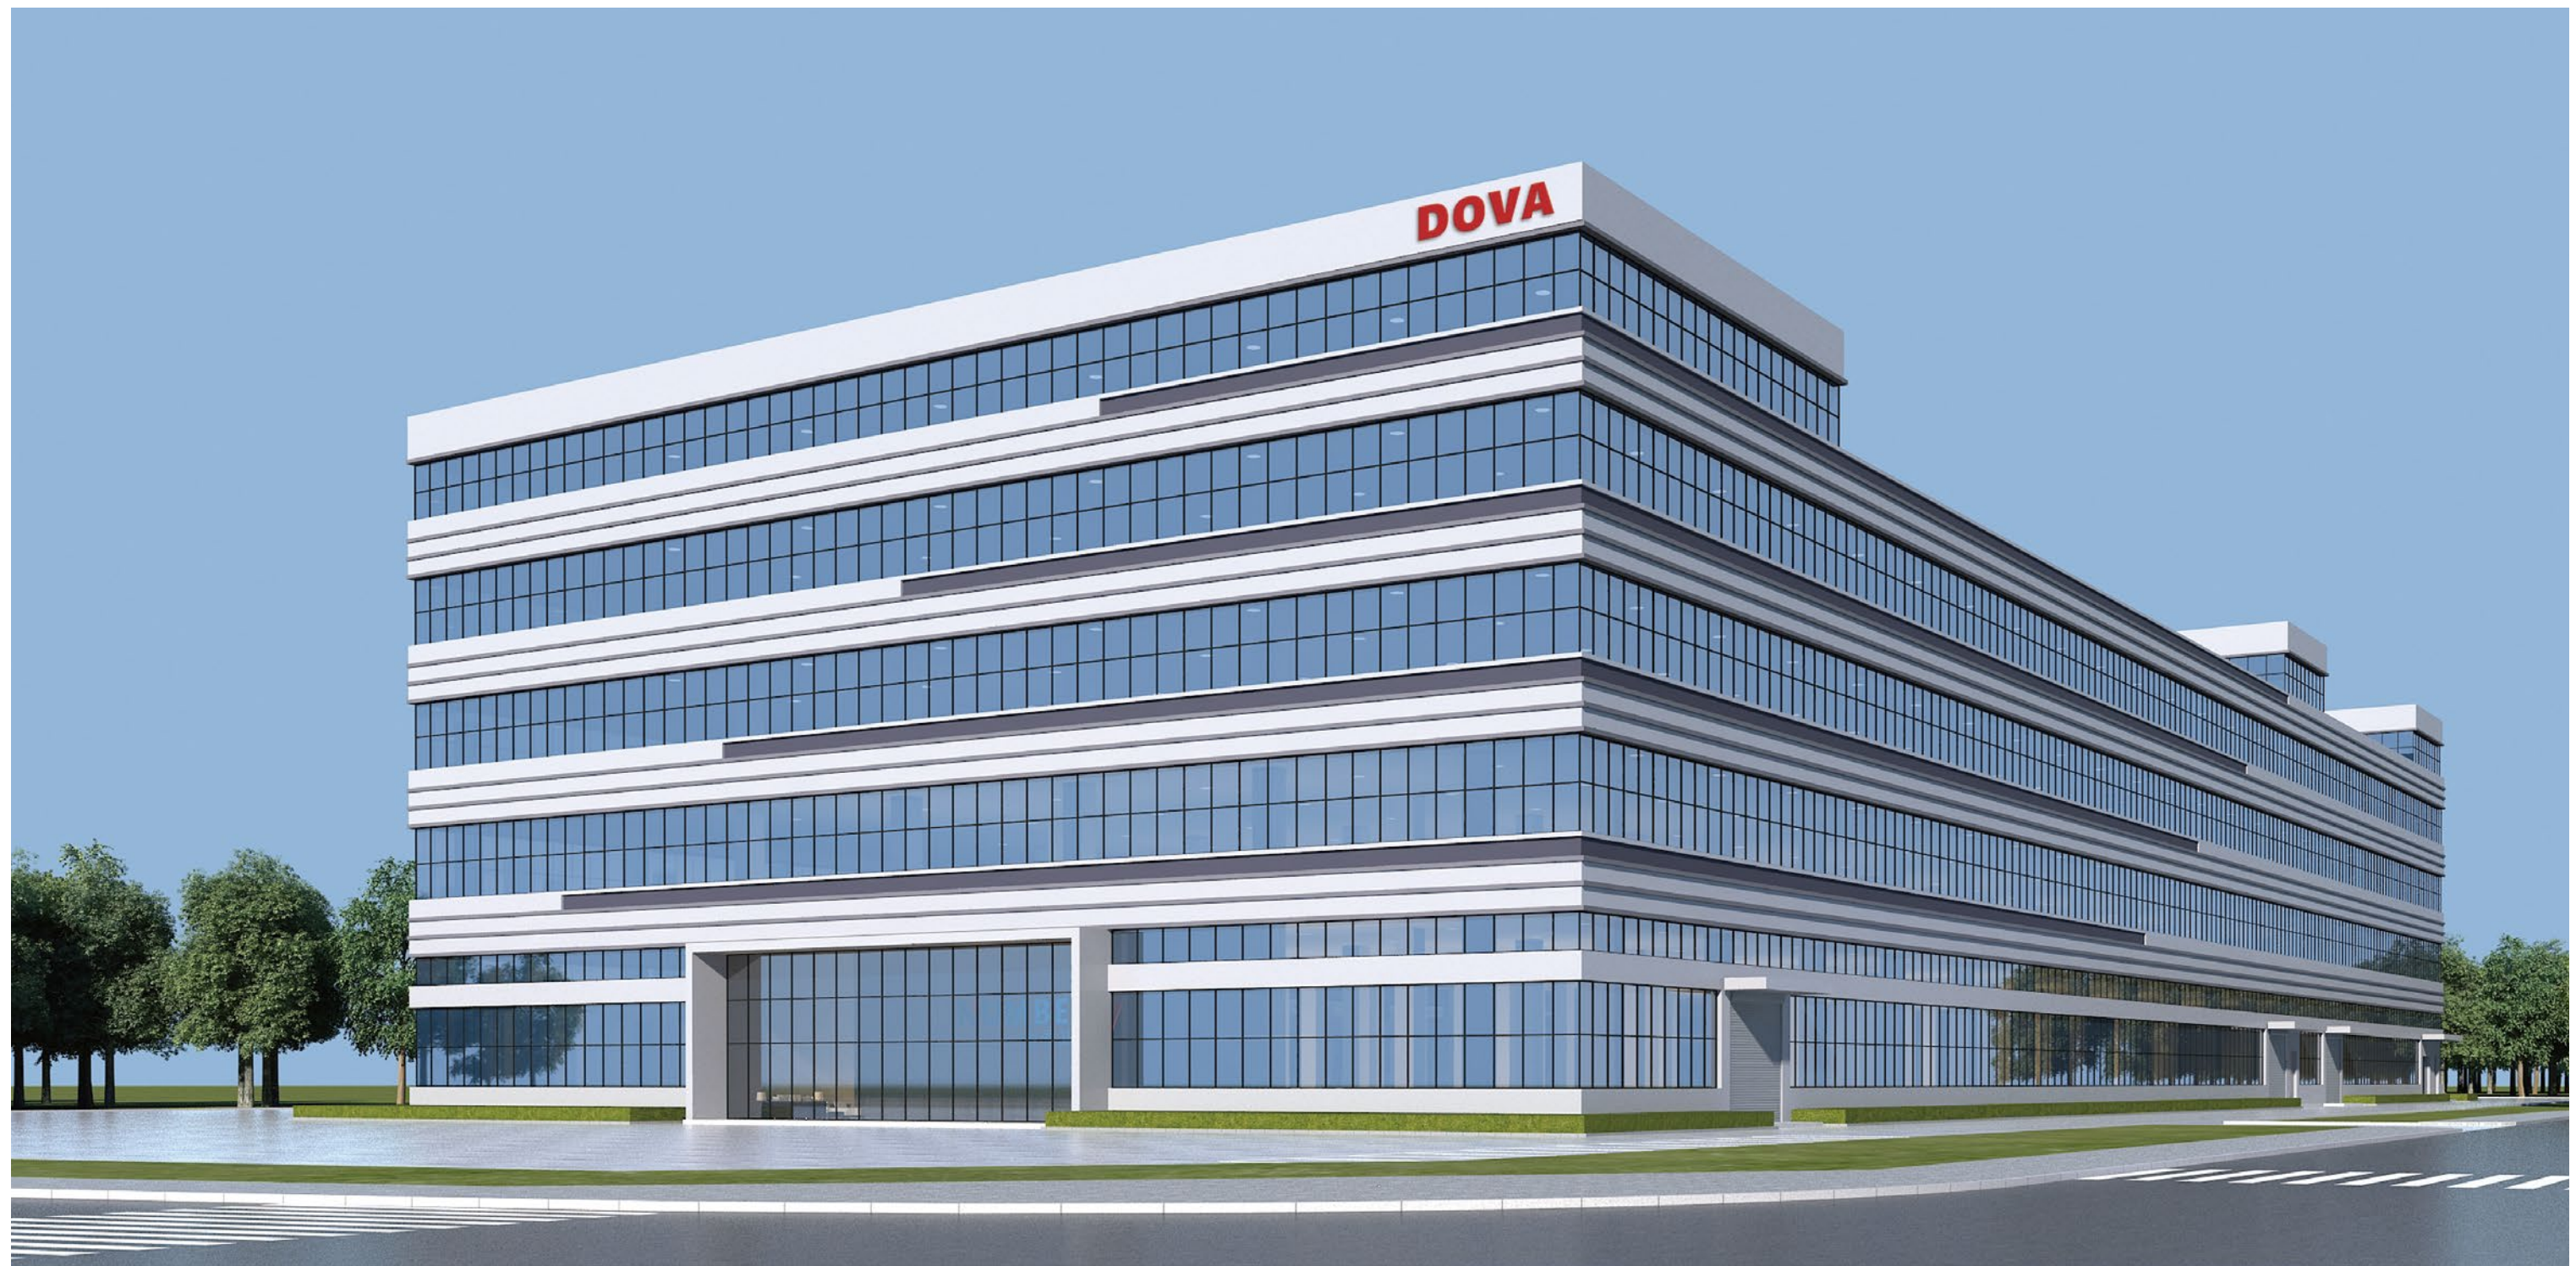


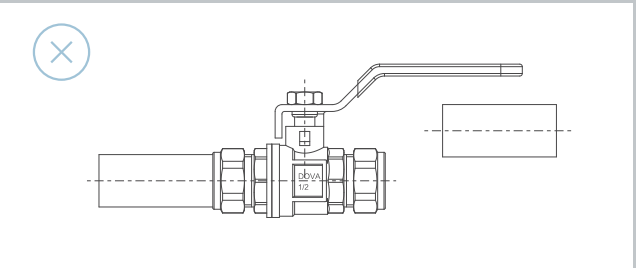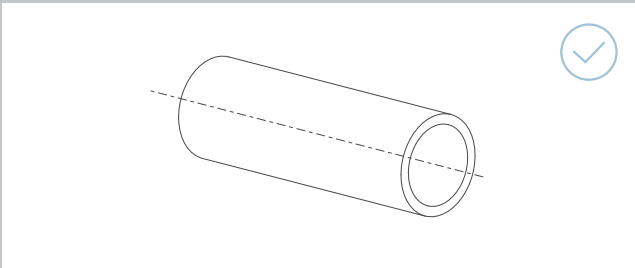

Ensure the pipe ends are clearly finished.
Place the pipes at same horizontal level with valve ends.



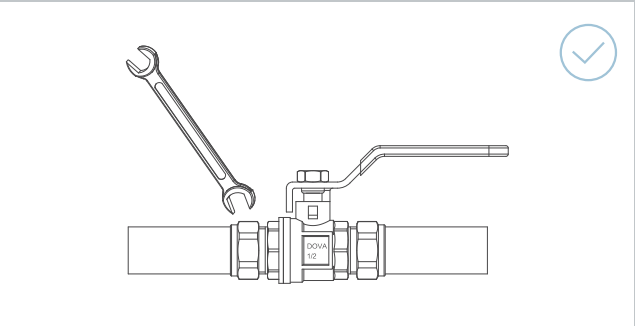
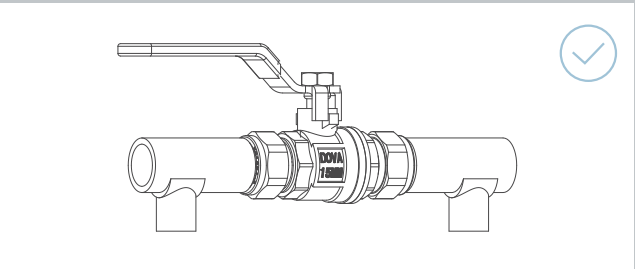


The pipes must be placed at horizontal position without bending, tighten the compression nut with a spanner, with no more than half turn.

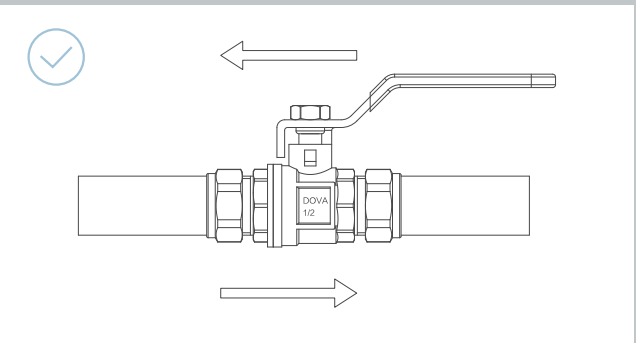
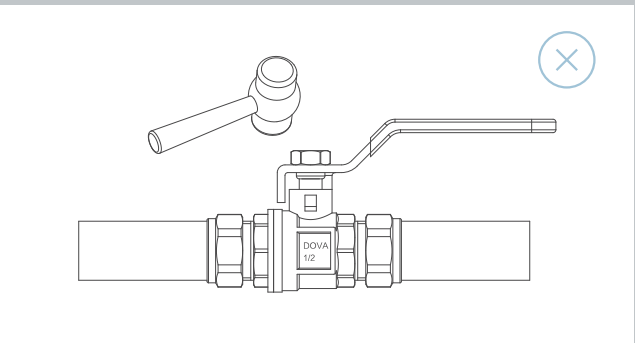


Avoid punching the valves which could affect the leakage tightness.
The valve can be installed at any direction.

Ensure pipe ends are clearly cleaned without scraps.
Pre-seal the pipe with PTFE tape, and avoid to use hemp seal.

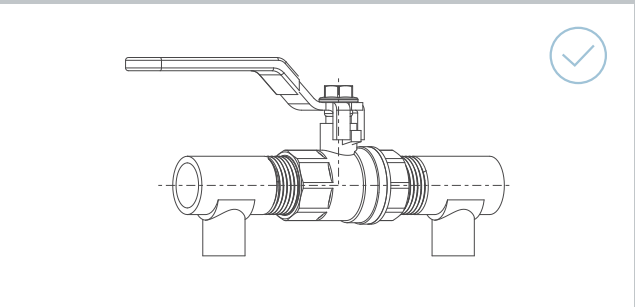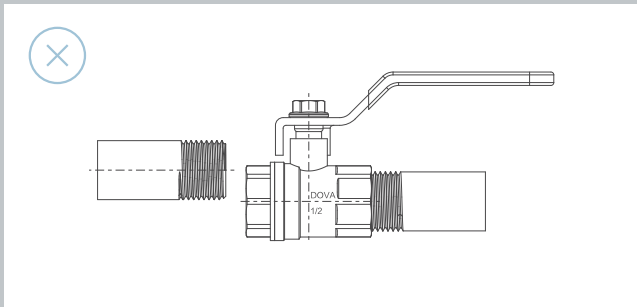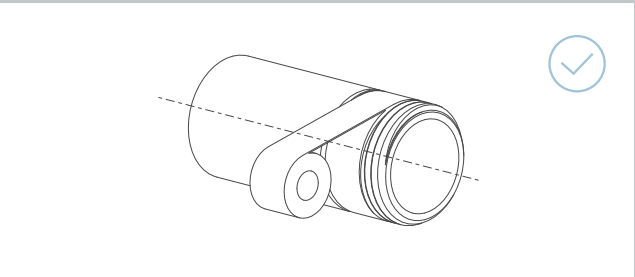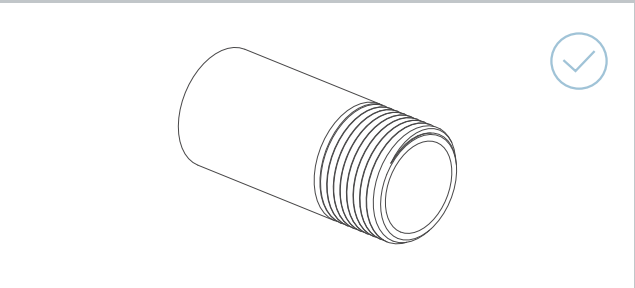

Ensure the pipe ends are clearly finished.
Place the pipes at same horizontal level with valve ends.

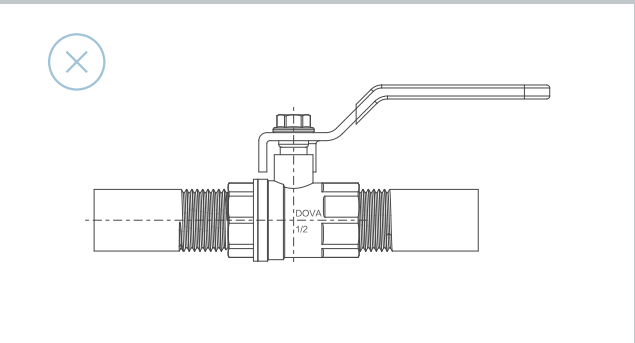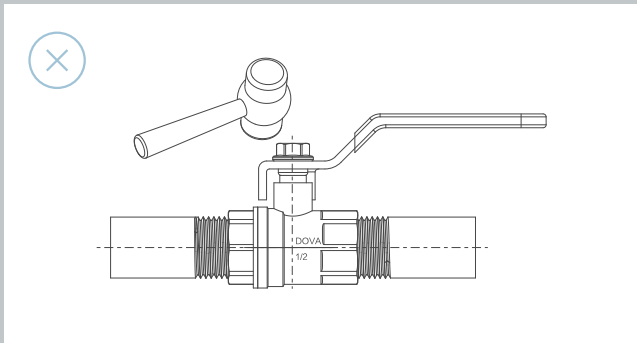

Avoid punching the valves which could affect the leakage tightness.
The valve can be installed at any direction.



CONTENTS

www.gafo.cc



01 /
BRASS
BALL VALVE



25 /
BRASS
GAS VALVE



27 /
BRASS
BIBCOCK



37 /
BRASS
MINI BALL VALVE



42 /
BRASS
CHECK VALVE



44 /
BRASS
STRAINER VALVE



45 /
BRASS
H-VALVE




46 /
BRASS
MANIFOLD




JL-B1001 JL-B1002
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1001

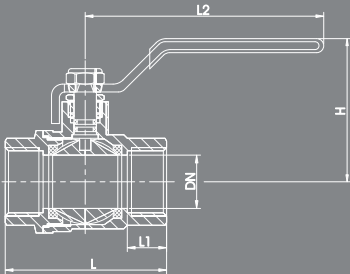

JL-B1002



JL-B1001

SIZE	DN	L	L1	L2	H
1/2"	15	48	10.5	83	50
3/4"	20	55	12	95	58
1"	25	67	14	116	64.5
1 1/4"	32	80	16.5	135	74.5
1 1/2"	40	94	19	135	82.5
2"	50	109	20	142	94


JL-B1002

SIZE	DN	L	L1	L2	H
1/2"	15	56	10.5	83	50
3/4"	20	62.5	12	95	58
1"	25	74.5	14	116	64.5
1 1/4"	32	87	16.5	135	74.5
1 1/2"	40	101	19	135	82.5
2"	50	117.5	20	142	94


JL-B1011 JL-B1012
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤100℃
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1011



JL-B1012

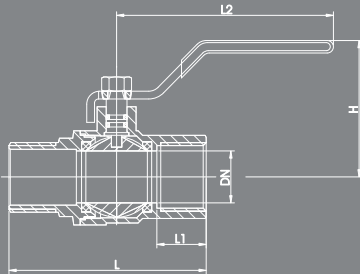

JL-B1011

SIZE	DN	L	L1	L2	H
1/2"	15	58	16	93	47.5
3/4"	20	66	17.5	95.5	52.5
1"	25	77	19.5	116	59.5
1 1/4"	32	94	23	129	73
1 1/2"	39.5	103	23.5	145.5	79.5
2"	50	123	27	145.5	87

JL-B1012


SIZE	DN	L	L1	L2	H
1/2"	15	64.5	16	93	47.5
3/4"	20	74	17.5	95.5	52.5
1"	25	85.5	19.5	116	59.5
1 1/4"	32	101	23	129	73
1 1/2"	39.5	112.5	23.5	145.5	79.5
2"	50	134	27	145.5	87




JL-B1051 JL-B1052
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1051



JL-B1052

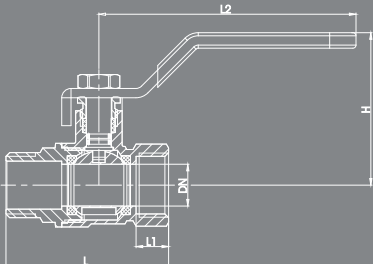

JL-B1051

SIZE	DN	L	L1	L2	H
1/2"	13.5	45	10.5	83	49
3/4"	17.5	50	10.5	83	52
1"	21	59	12.5	116	62.5
1 1/4"	30	71	14	145	74.5
1 1/2"	35	80	15	145	78.5
2"	44	91	15	145	89


JL-B1052

SIZE	DN	L	L1	L2	H
1/2"	13.5	52	10.5	83	49
3/4"	17.5	57	10.5	83	52
1"	21	67.5	12.5	116	62.5
1 1/4"	30	78	14	145	74.5
1 1/2"	35	89.5	15	145	78.5
2"	44	100	15	145	89


JL-B1061 JL-B1062
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure:2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-1061



JL-1062

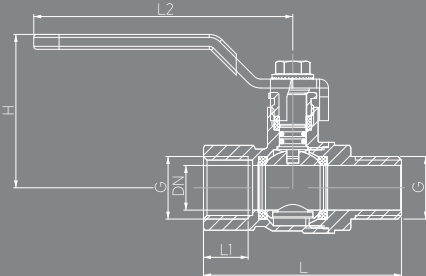

JL-1062

G	DN	L1	L2	L	H
1/2"	15	15	60	60	61.5
3/4"	20	18	60	70	64.5
1"	25	20.5	81.5	82	84.5


G	DN	L1	L2	L	H
1/2"	15	15	87	66.5	51.5
3/4"	20	18	87	76	54.5
1"	25	20.5	116.5	86	69
1 1/4"	32	23	141.5	101.5	80
1 1/2"	40	23	141.5	111	86.5
2"	50	26.5	141.5	133.5	98.5



JL-B1063

TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure:2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

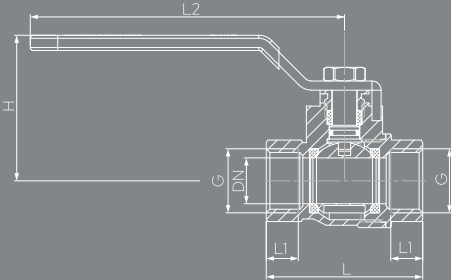

JL-1063


G	DN	L1	L2	L	H
1/2"	15	10.5	103	51	47.5
3/4"	20	11.5	103	58	51
1"	25.4	12.5	126.5	67	62
1 1/4"	32	14	126.5	79	69
1 1/2"	40	15	168	88	78
2"	50.8	16	168	105	92
2 1/2"	69	21	242.5	138	126.5
3"	79	23	242.5	153	134.5
4"	102	26	242.5	191	158

JL-B1066 JL-B1065

TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure:2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid


JL-1066



JL-1066

G	DN	L1	L2	L	H
1/2"	15	13.5	62	64.5	50.5
3/4"	20	14.5	62	71	53.5
1"	25	17	76	83	62.5

JL-1065

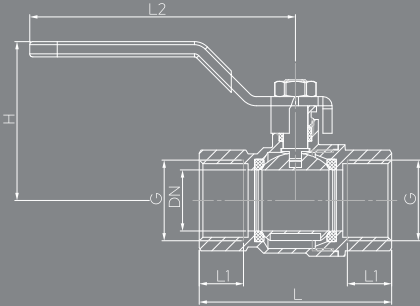

JL-1065


G	DN	L1	L2	L	H
3/8"	10	10.5	85.5	45	40
1/2"	15	13.5	85.5	57	45
3/4"	20	14.5	87	63	52
1"	25	17	108.5	75	63
1 1/4"	32	19	133	89	68
1 1/2"	40	19.5	142.5	98	78
2"	50	23.5	149.5	120	90



JL-B1069

TECHNICAL PARAMETER

- ◇ Medium temperature:-20°C≤t≤110°C
- ◇ Maximum working pressure:2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

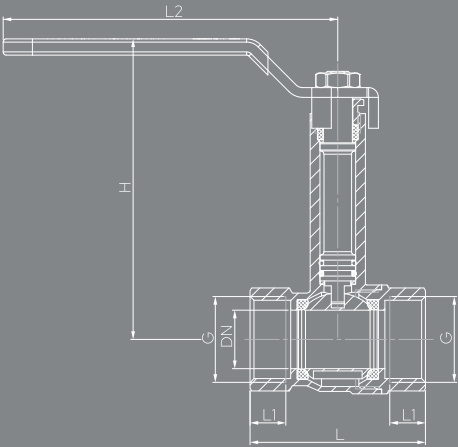

JL-1069


G	DN	L1	L2	L	H
1/2"	14	49	10.5	103	89.5
3/4"	18	54	11	103	92.5
1"	23	63	12.5	126.5	101.5
1 1/4"	30	74	14	126.5	116
1 1/2"	37	84	15	168	127
2"	47	99	16	168	135

JL-B1081 JL-B1082


TECHNICAL PARAMETER

- ◇ Medium temperature:-20°C≤t≤110°C
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1081



JL-B1082

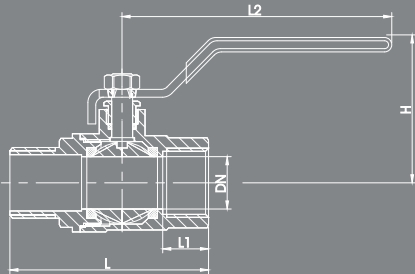

JL-B1081

SIZE	DN	L	L1	L2	H
1/2"	14.5	51	13	83	46
3/4"	19	58	14	83	50
1"	23	66	15.5	116	59
1 1/4"	30	78	17.5	116	65
1 1/2"	37	88	18.5	145	77
2"	45	105	21	162	89
2 1/2"	63	132	23	242	122
3"	75	146	25	242	131
4"	97	175	27	242	147

JL-B1082


SIZE	DN	L	L1	L2	H
1/2"	14.5	60	13	83	46
3/4"	19	66	14	83	50
1"	23	75.5	15.5	116	59
1 1/4"	30	87.5	17.5	116	65
1 1/2"	37	98.5	18.5	145	77
2"	45	116	21	162	89




JL-B1101 JL-B1102
TECHNICAL PARAMETER

- ◇ Medium temperature: -20°C ≤ t ≤ 110°C
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B1101



JL-B1102

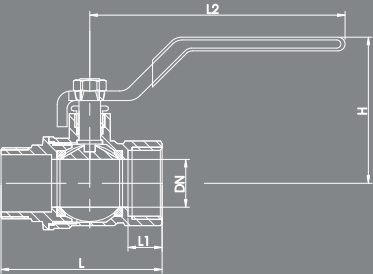

JL-B1101


SIZE	DN	L	L1	L2	H
1/2"	13	43	9.5	83	45.5
3/4"	17.5	51.5	11.5	83	49
1"	22	58	12	116	58
1 1/4"	29	71	14.5	116	65
1 1/2"	36	80	14.5	145	76
2"	45	95	16	161.5	89.5
2 1/2"	54	121	22	242	113
3"	63	133	23.5	242	118.5
4"	79	167	30.5	242	130.5

JL-B1102

SIZE	DN	L	L1	L2	H
1/2"	13	48	10	83	45.5
3/4"	17.5	58.5	11.5	83	49
1"	22	64.5	12	116	58
1 1/4"	29	77.5	14.5	116	65
1 1/2"	36	88.5	14.5	145	76
2"	45	102.5	16	161.5	89.5


JL-B1121
TECHNICAL PARAMETER

- ◇ Medium temperature: -20°C ≤ t ≤ 110°C
- ◇ Maximum working pressure: 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

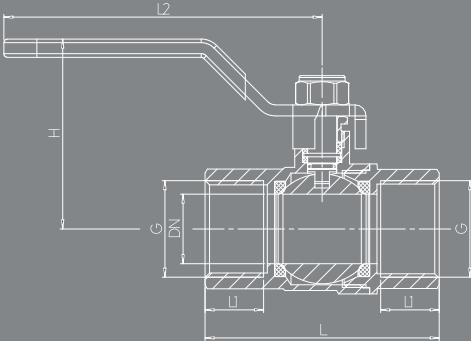

JL-B1121


G	DN	L1	L2	L	H
1/2"	13	14.5	85.5	57	43.9
3/4"	19	16	87	64	51.9
1"	24	17	108.5	74	63.9
1 1/4"	30	19	133	85	65.7
1 1/2"	38	18.5	149.5	95	81.7
2"	47.5	18	149.5	110	91.7

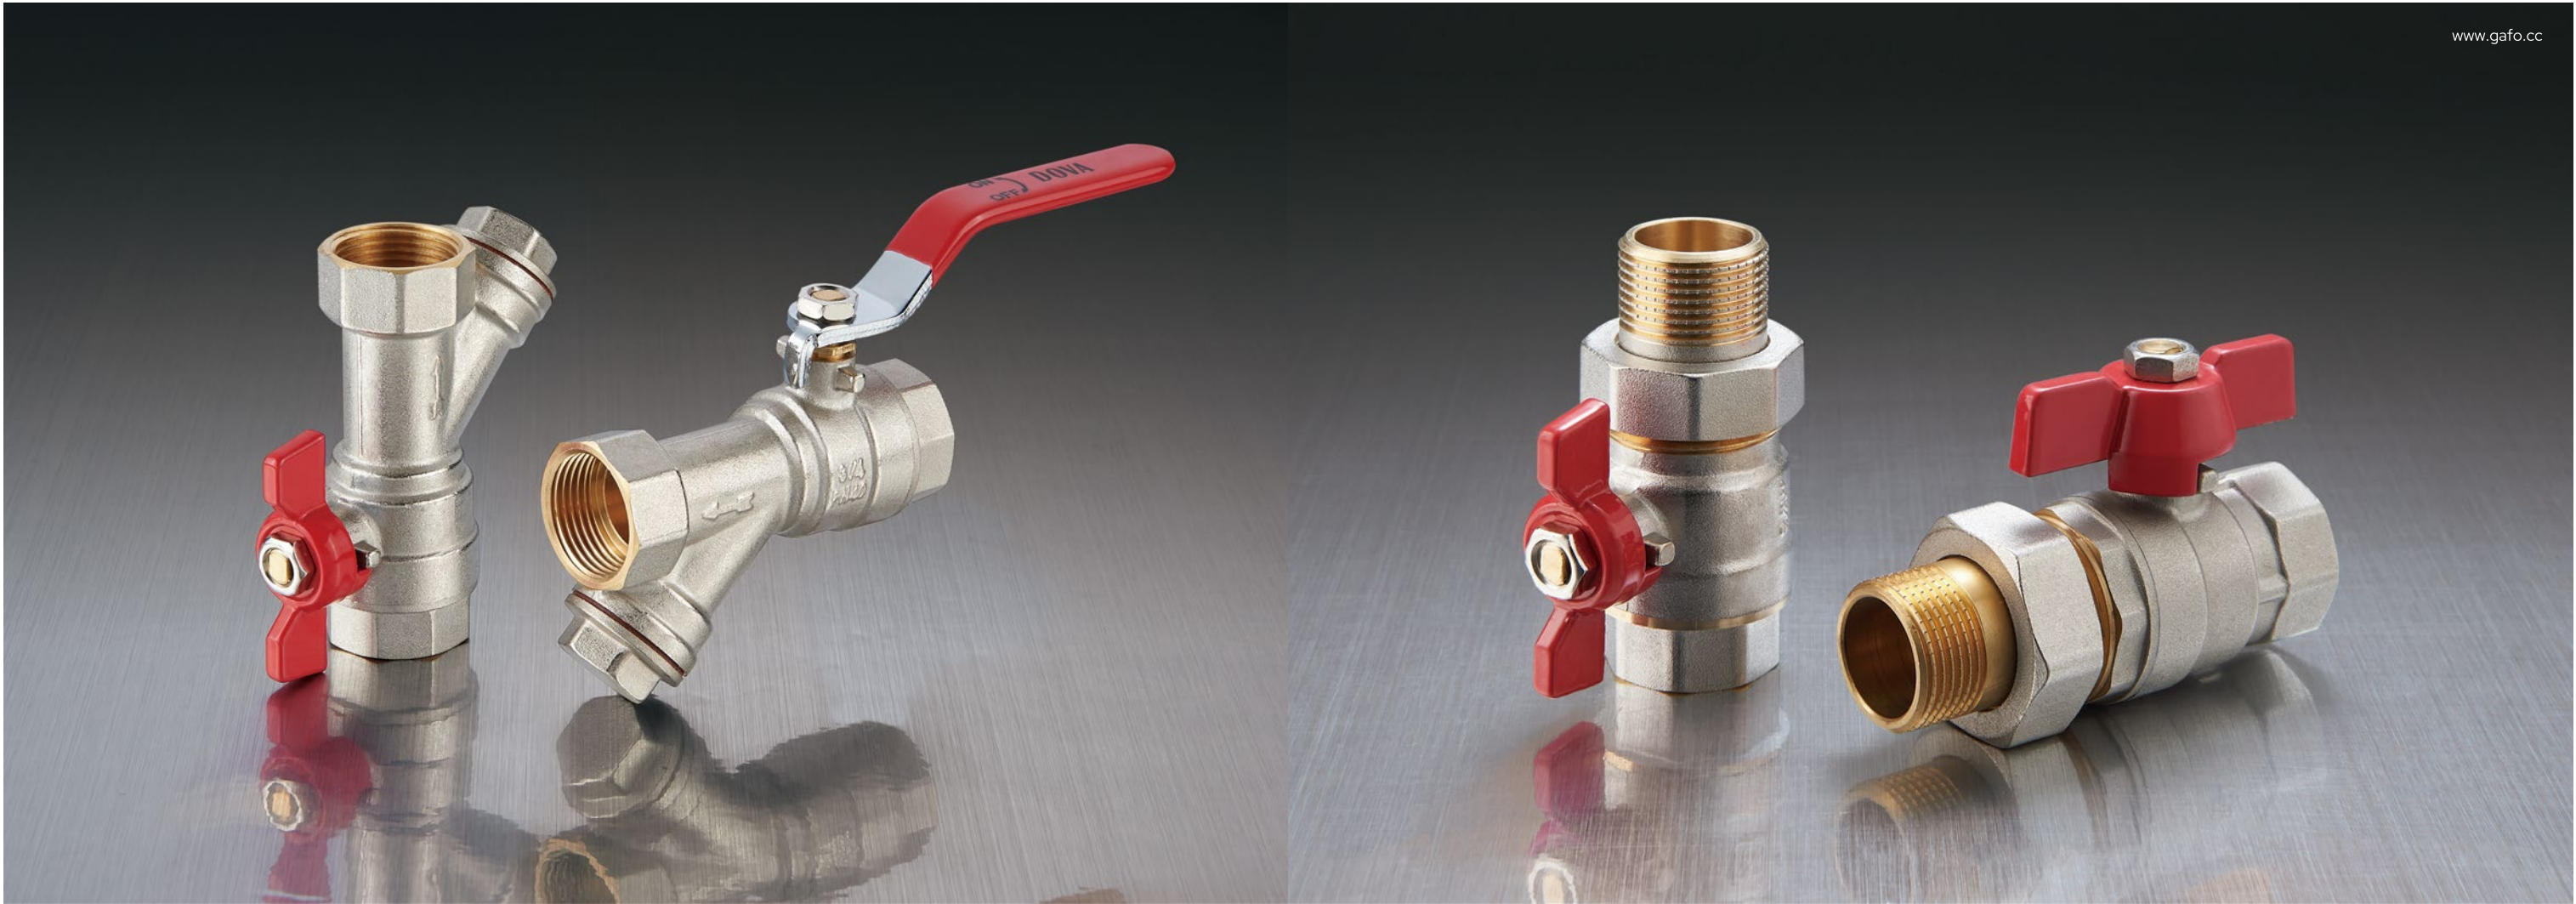


JL-B1151
TECHNICAL PARAMETER

- ◇ Medium temperature:-20°C≤t≤110°C
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1151

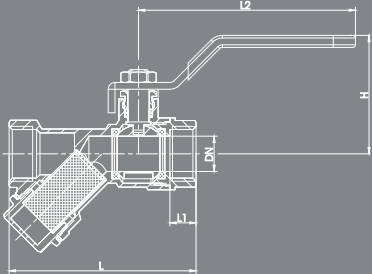


JL-B1151




JL-B1171 JL-B1161
TECHNICAL PARAMETER

- ◇ Medium temperature:-20°C≤t≤100°C
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1171



JL-B1161



JL-B1171


SIZE	DN	L	L1	L2	H
1/2"	14.5	72	12	52	37.5
3/4"	19	75	12	52	44.5
1"	23	89	13.5	62	47.5
1 1/4"	30	112.5	15.5	62	54

JL-B1161

SIZE	DN	L	L1	L2	H
1/2"	14.5	78.5	12	51.5	38
3/4"	19	90	13.5	63	41.5
1"	23	97.5	16.5	63	45

JL-B1151

SIZE	DN	L	L1	L2	L3	H	H1
1/2"	13.5	73	11.5	83	52.5	46	35
3/4"	17.5	85	11.5	83	52.5	49	38
1"	23	101	13	116	67	58.5	49

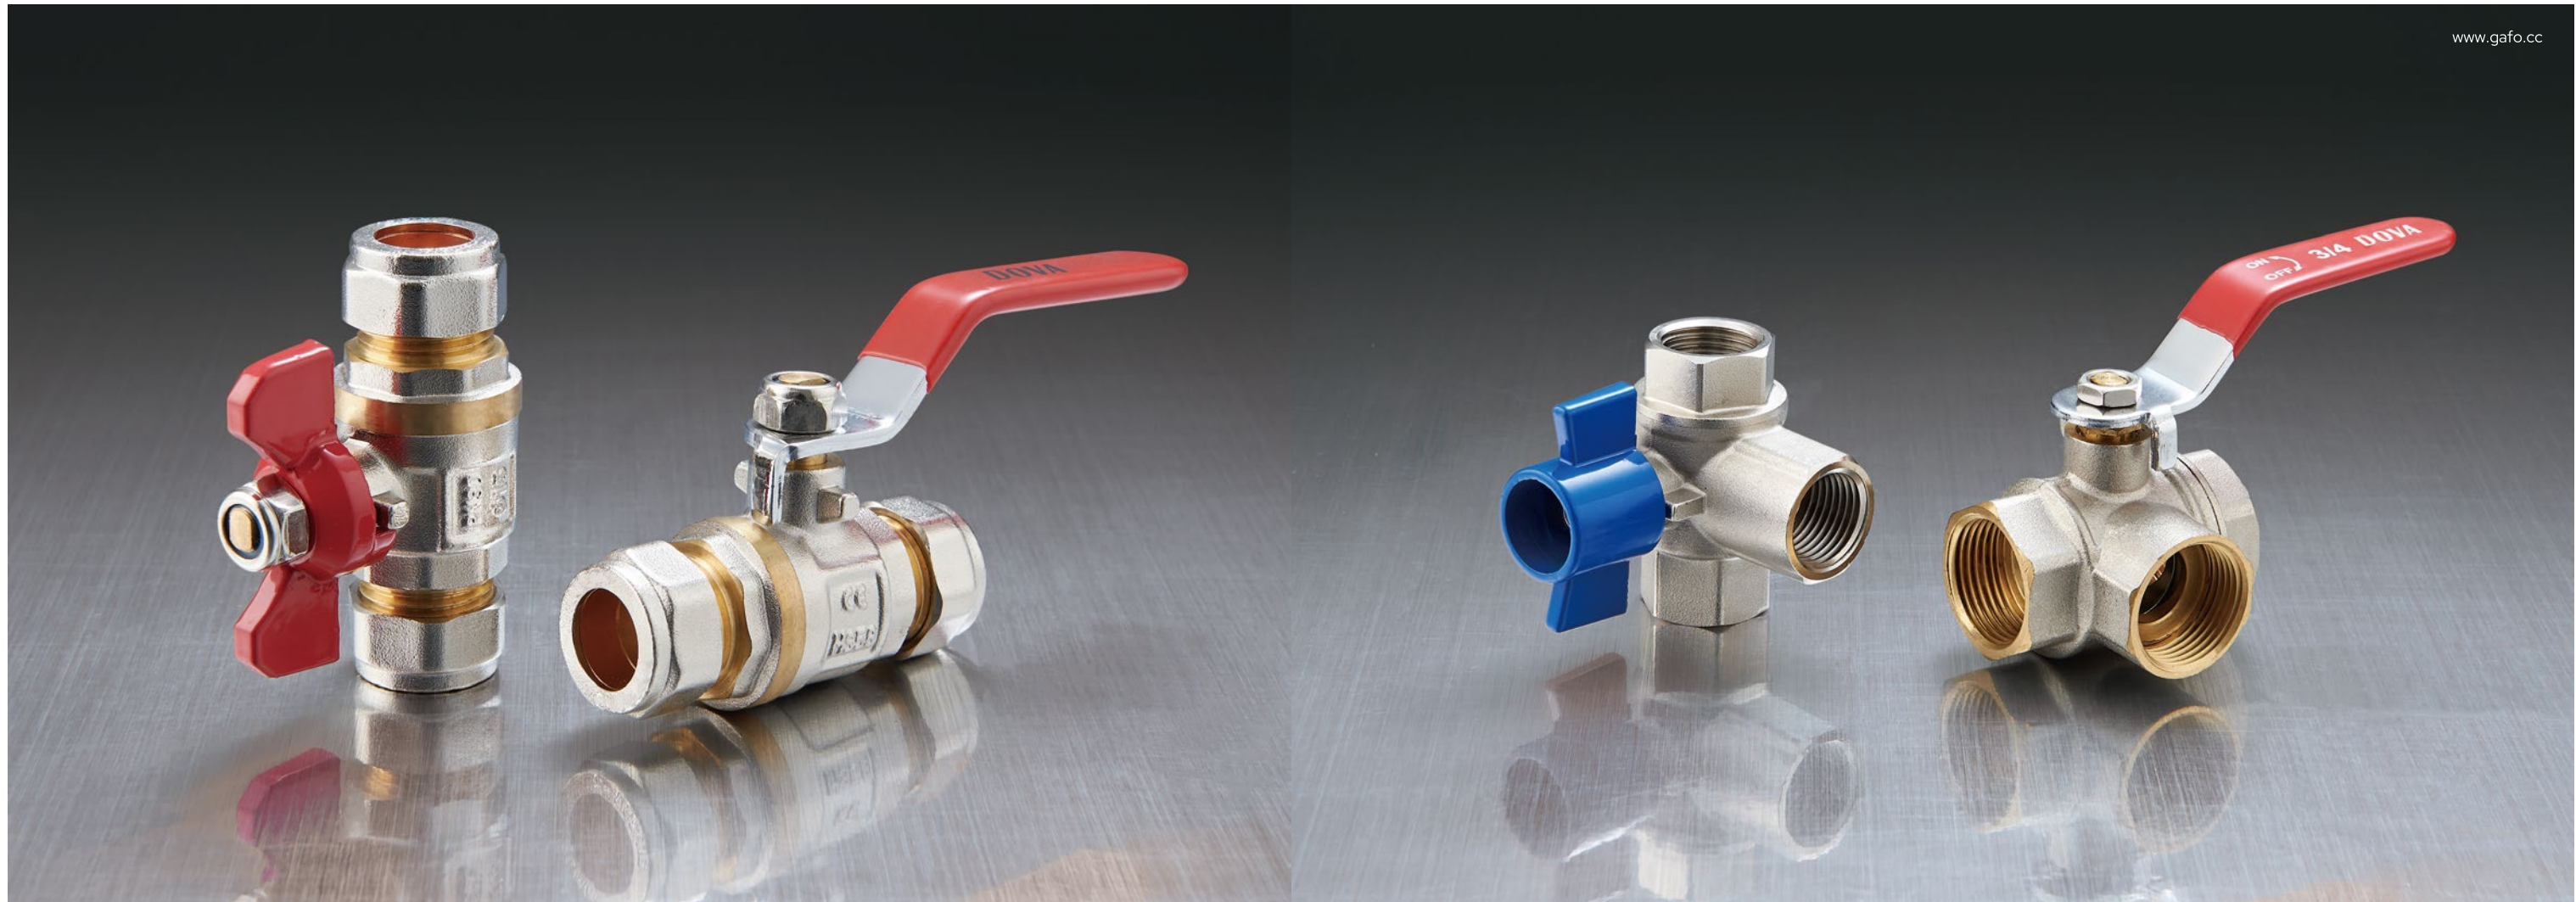


JL-B1181


TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B1181

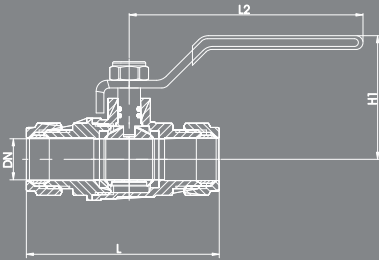

JL-B1181



JL-B1181



SIZE	DN	L	L1	L2	H	H1
Ø15	14.5	69.5	50	81.5	37.5	48.5
Ø18	14.5	71.5	50	81.5	37.5	48.5
Ø22	19	81.5	50	93	41	50.5
Ø28	23	87	63	116	50	59

JL-B1190A JL-B1190B


ECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 110^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B1190A



JL-B1190B

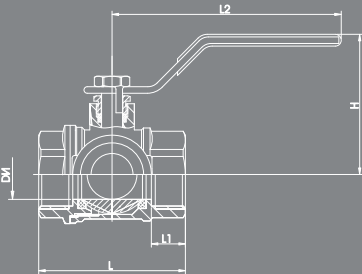

L-B1190A

SIZE	DN	L	L1	L2	L3	H
1/2	10	57	34.5	15	48	45

JL-B1190B


SIZE	DN	L	L1	L2	H
1/2"	15	53	12.5	87	49
3/4"	19	55	12.5	87	51.5
1"	23	66	15.5	130	64.5



JL-B1190C

TECHNICAL PARAMETER

- ◇ Medium temperature:-20°C≤t≤110°C
- ◇ Maximum working pressure:2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid



JL-1190C


G	DN	L1	L2	L	H
3/4"	19	11	67	55	45
1"	23	14	67	68	50

JL-B1715A JL-B1715B


TECHNICAL PARAMETER

- ◇ Medium temperature:-20°C≤t≤110°C
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1715A

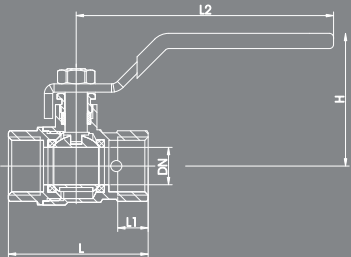

JL-B1715B

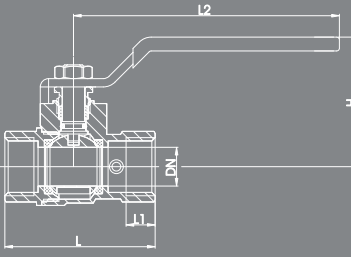


JL-B1715A

SIZE	DN	L	L1	L2	H
1/2"	13.5	50.5	11	93	48
3/4"	19	57.5	11	93	52.5
1"	23	71.5	13.5	116	58
1 1/4"	30	78.5	14	143	71
1 1/2"	37	94	16	143	76.5
2"	47	106	16	162.5	92


JL-B1715B

SIZE	DN	L	L1	L2	H
1/2"	14	54.5	10.5	103	47
3/4"	18	60	12	103	49.5
1"	23	69	13.5	126	61

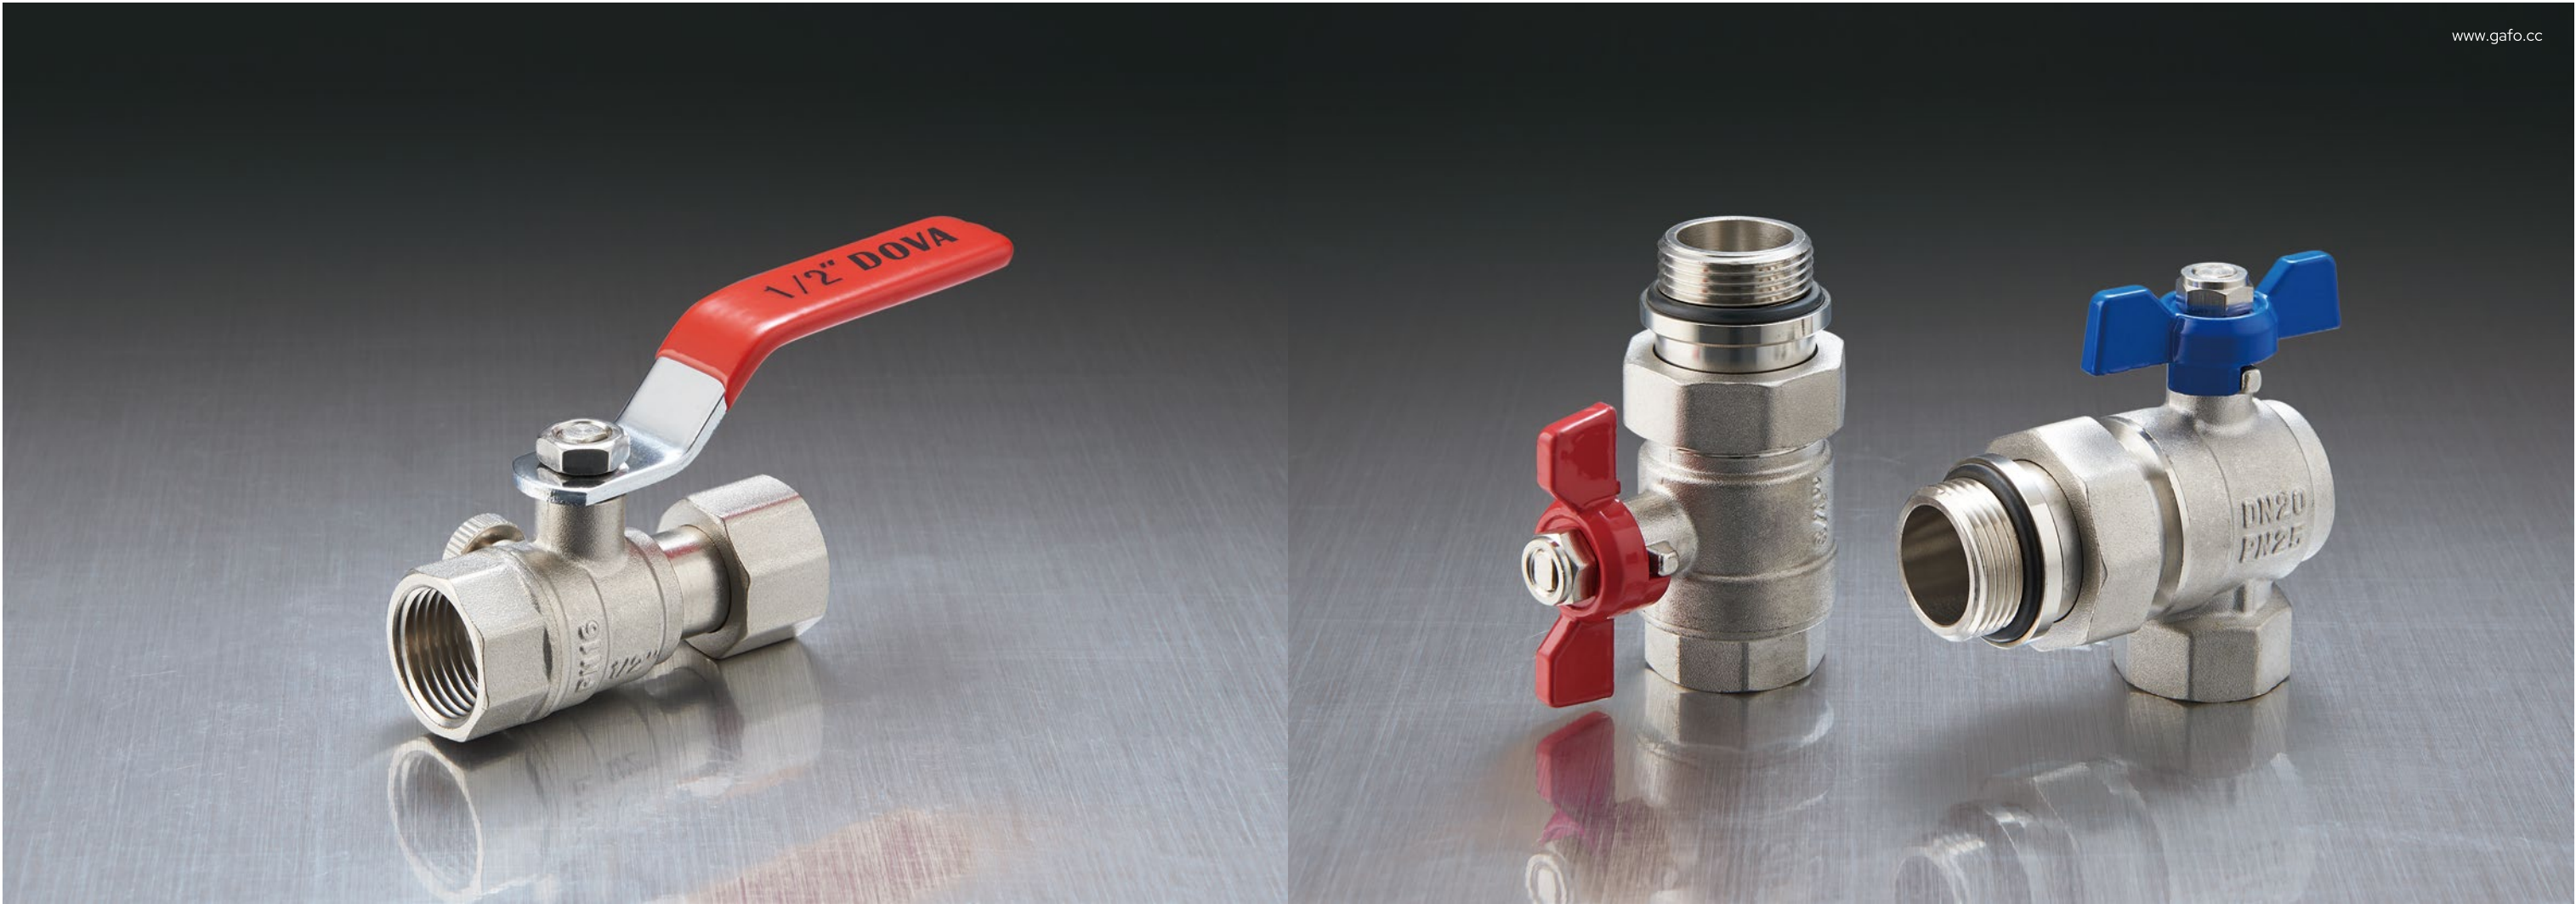

JL-B1720
TECHNICAL PARAMETER

- ◇ Medium temperature: -20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

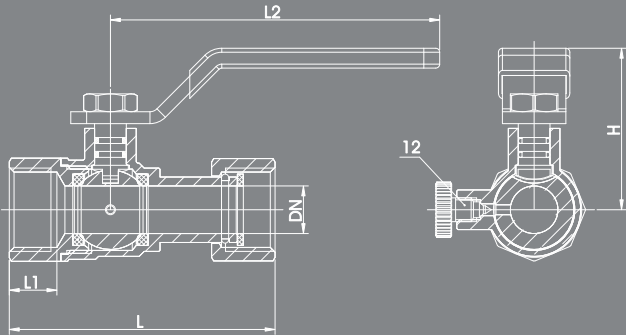


SIZE	DN	L	L1	L2	H
1/2"	12	67	12	83	41


JL-B1869 JL-B1868
TECHNICAL PARAMETER

- ◇ Medium temperature: -20℃≤t≤110℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B1869



JL-B1868



SIZE	DN	L	L1	L2	H
3/4"	19	78	13	52.5	42
1"	24.5	95.5	14	67	52.5


SIZE	DN	L	L1	L2	H	H1
3/4"	19	57	13	52.5	42	31.5
1"	24.5	69	14	67	52.5	39




JL-B1875 JL-B1876
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1875



JL-B1876



JL-B1875

SIZE	DN	L	L1	L2	H
1/2"	14.5	74	17	52.5	35
3/4"	19	84	19.5	52.5	38.5
1"	24.5	98.5	21	67	50


JL-B1876

SIZE	DN	L	L1	L2	H	H1
1/2"	14.5	44	17	52.5	35	35
3/4"	19	49.5	19.5	52.5	38.5	41
1"	24.5	59	21	67	50	48


JL-B1888 JL-B1880
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B1888

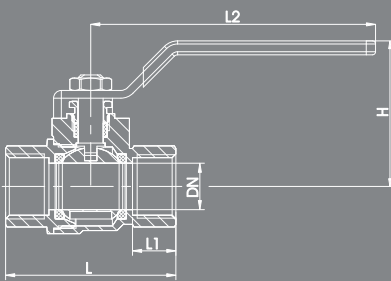

JL-B1880

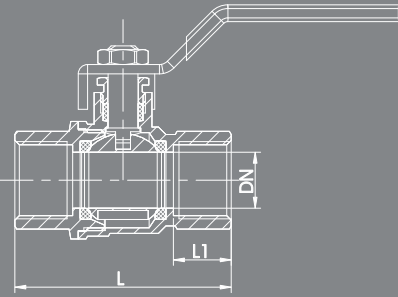

JL-B1888

SIZE	DN	L	L1	L2	H
1/4"	10	45	12	82	43
3/8"	10	45	12	82	43
1/2"	15	55	14	92	47
3/4"	20	62	15	92	50
1"	25	71	16	118	60
1 1/4"	32	86	18.5	150	71.5
1 1/2"	40	97	19.5	150	77
2"	50	113	21.5	168.5	92

JL-B1880


SIZE	DN	L	L1	L2	H
1/4"	10	47	13.5	84	43
3/8"	10	47	13.5	84	43
1/2"	15	58	15.5	95	47
3/4"	20	64	16.5	95	50
1"	25	77	19	118	64.5
1 1/4"	32	91	21	159.5	76.5
1 1/2"	40	100	21	159.5	82
2"	50	121	25.5	171.5	95




JL-B1891 JL-B1881
TECHNICAL PARAMETER

- ◇ Medium temperature: -20°C ≤ t ≤ 110°C
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B1891



JL-B1881



JL-B1891

SIZE	DN	L	L1	L2	H
1/4"	10	44	11	86	43.5
3/8"	10	44	11	86	43.5
1/2"	13.5	49	12	86	49.5
3/4"	19	59	14.5	93.5	55
1"	23	66	15	118	62
1 1/4"	30	77	17	118	72.5
1 1/2"	37	88	18.5	140.5	83
2"	47	103	19	140.5	90.5
2 1/2"	60	123	23	243	117
3"	69	144	25.5	243	127
4"	90	171	28.5	243	140


JL-B1881

SIZE	DN	L	L1	L2	H
1/2"	14.5	52	13.5	97	51.5
3/4"	19	57	13.5	97	52
1"	23	68	16	110.5	60.5
1 1/4"	31	80	17	140	78
1 1/2"	40	90	17	140	87.5
2"	49	103	18	162	96


JL-B1897A JL-1897B
TECHNICAL PARAMETER

- ◇ Medium temperature: -20°C ≤ t ≤ 110°C
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B1897A

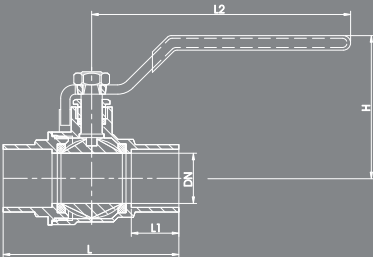

JL-B1897B

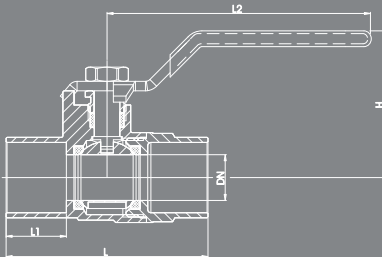

JL-B1897A

SIZE	DN	L	L1	L2	H
Ø16	13.5	55	14	86	49.5
Ø22	19	67	18	93.5	55
Ø28	23	83.5	24	118	62
Ø35	30	96	26	118	72.5
Ø42	37	104	26	140.5	83
Ø54	47	132	33	140.5	90.5

JL-B1897B


SIZE	DN	L	L1	L2	H
Ø15.9	10	48	13	84	44
Ø22.3	14.5	64	19	84	46.5
Ø28.7	17.5	71	20.5	113	55
Ø35	23	93	27.5	113	65
Ø41.4	30	101.5	27.5	135	75
Ø54.1	38	124	35	135	85



JL-B1898

TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:water,non-corrosive liquid

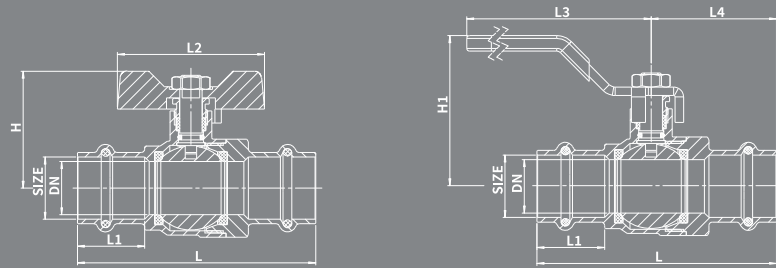


JL-B1898

SIZE	DN	L	L1	L2	L3	L4	H	H1
15mm	Ø14	80.5	24	52.5	93	43.5	38.2	50
18mm	Ø15	83	24	52.5	93	44	38.7	50.5
22mm	Ø19	85	24	52.5	93	44.5	41.7	53.5
28mm	Ø24	96	27.5	67	116	50.5	52.2	61.9
35mm	Ø30	111.5	30	67	116	57	56.7	66.4

JL-B1899

TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:water,non-corrosive liquid

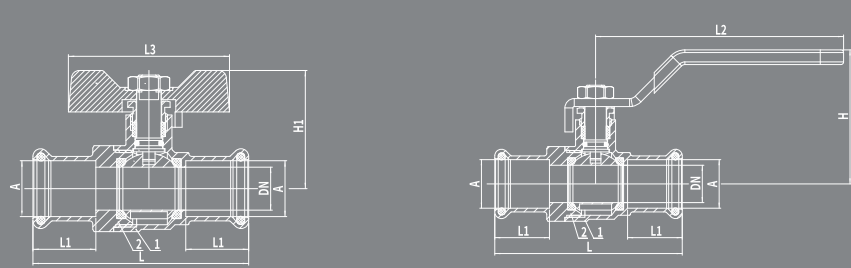

JL-B1899

SIZE	DN	L	L1	L2	L3	A	H	H1
15X15	14	70.3	20.5	93	52.5	15.2	50.3	38.5
18x18	14	70.3	20.5	93	52.5	18.2	50.3	38.5
22x22	19	75.5	21	93	52.5	22.2	53.5	41.7
28x28	23	85.5	23	116	67	28.2	61.7	52
35x35	30	97.5	26	116	67	35.3	66.7	57




JL-B1905 JL-B1906


TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:gas

JL-B1905

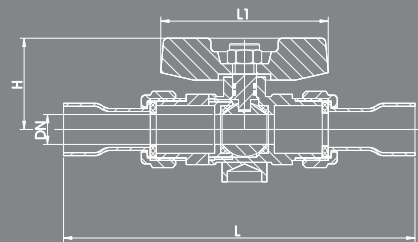

JL-B1906

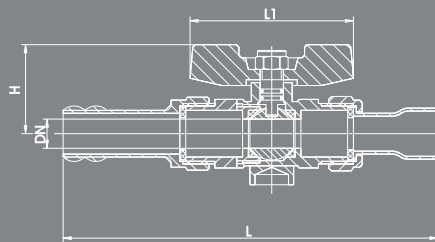

JL-B1905

SIZE	DN	L	L1	H
16MM	10	117.5	56	30.5


JL-B1906

SIZE	DN	L	L1	H
16MM	10	128.5	56	30.5

JL-B1907

TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:gas

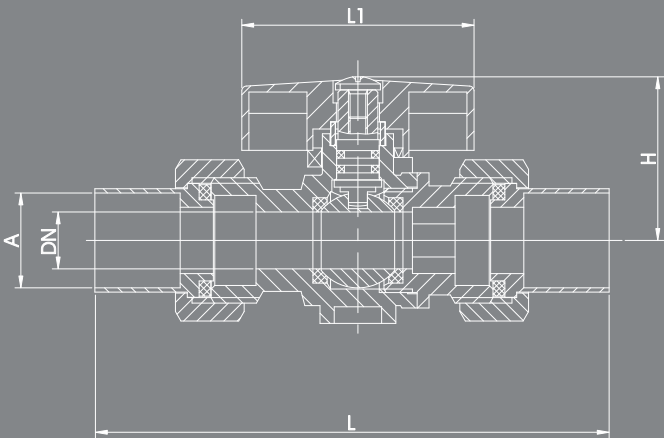

JL-B1907


SIZE	DN	L	L 1	A	H
1/2"	10	96	39	Ø14 ^{+0.1} ₀	33.5
3/4"	12	108	39	Ø20 ^{+0.1} ₀	34.5



JL-B2001

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

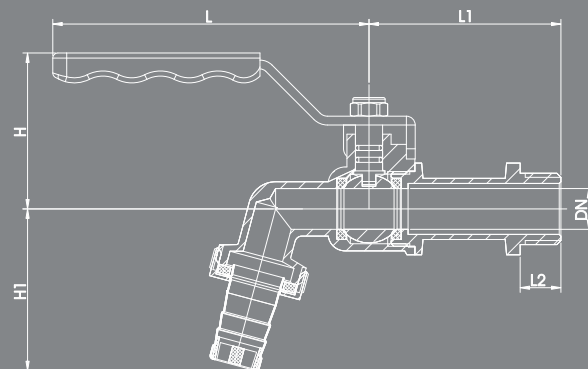


JL-B2001

SIZE	DN	L	L1	L2	H	H1
1/2"	12	93	56.5	12	43.5	47.5
3/4"	14.5	93	56.5	12	45	55

JL-B2002


TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

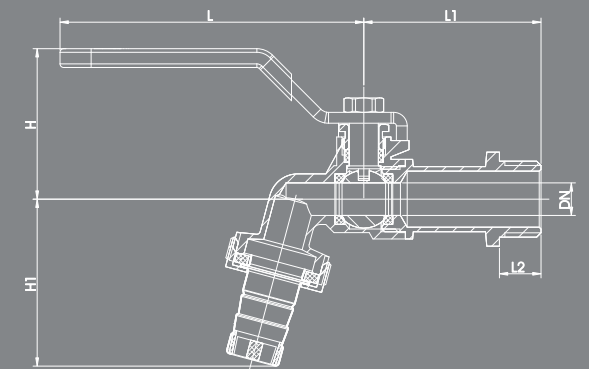

JL-B2002


SIZE	DN	L	L1	L2	H	H1
1/2"	9	84	49	11.5	44.5	46
3/4"	12	84	55.5	12.5	45.5	52.5

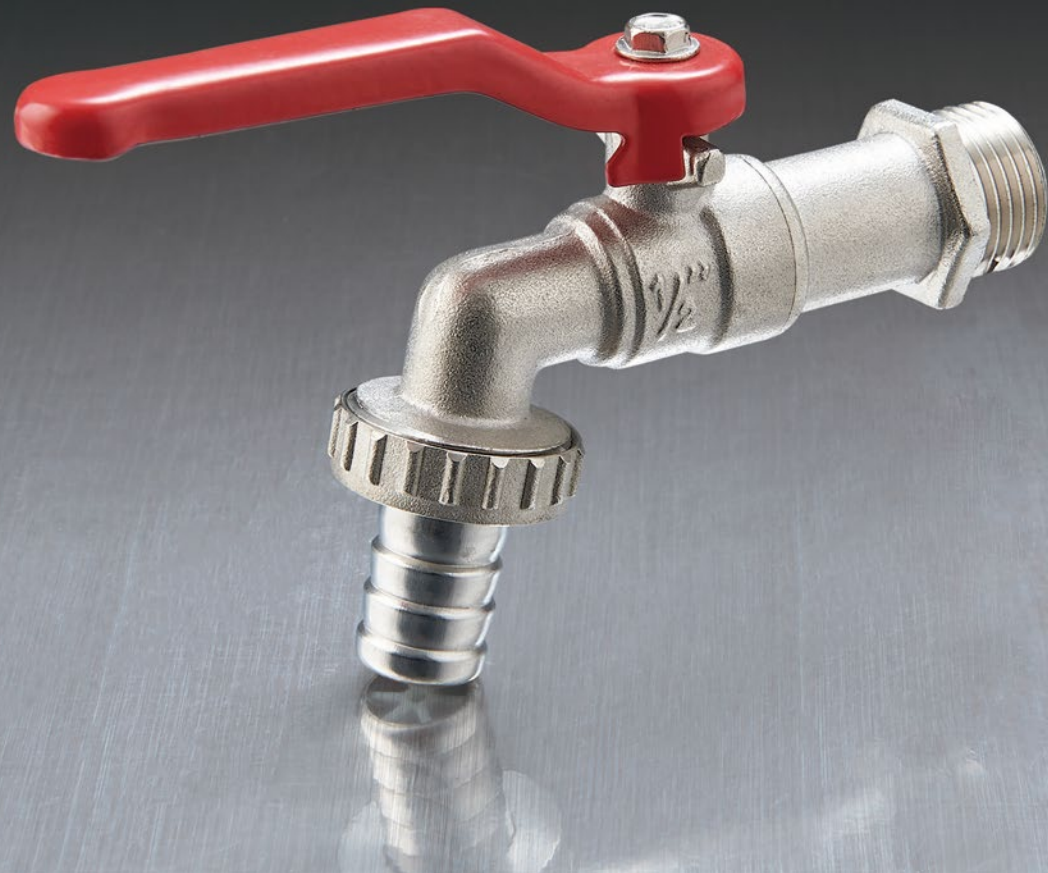

JL-B2005

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

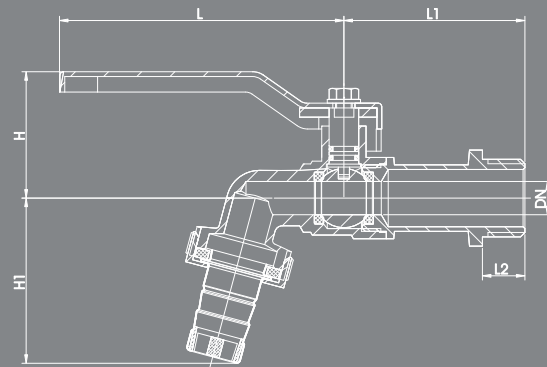

JL-B2005


SIZE	DN	L	L1	L2	H	H1
1/2"	9	77	49	11.5	35	44.5
3/4"	12	77	54.5	13	37	49
1"	14.5	113	67	17	46	64



JL-B2006

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

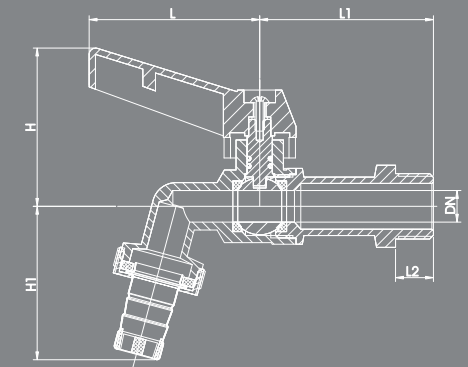

JL-B2006


SIZE	DN	L	L1	L2	H	H1
1/2"	12	55.5	51	12	53.5	46
3/4"	13.5	55.5	54.5	13	54.5	49



JL-B2007


TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

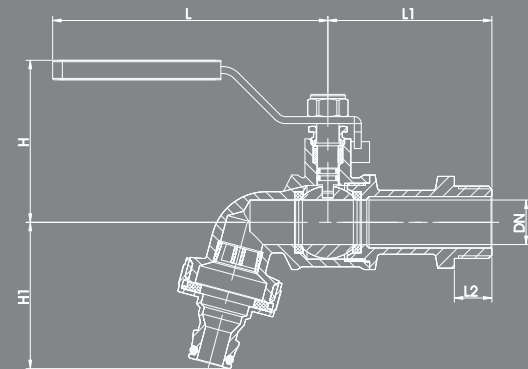

JL-B2007


SIZE	DN	L	L1	L2	H	H1
1/2"	10	99	59	12.5	55	50.5
3/4"	16	99	59	13.5	58	52.5

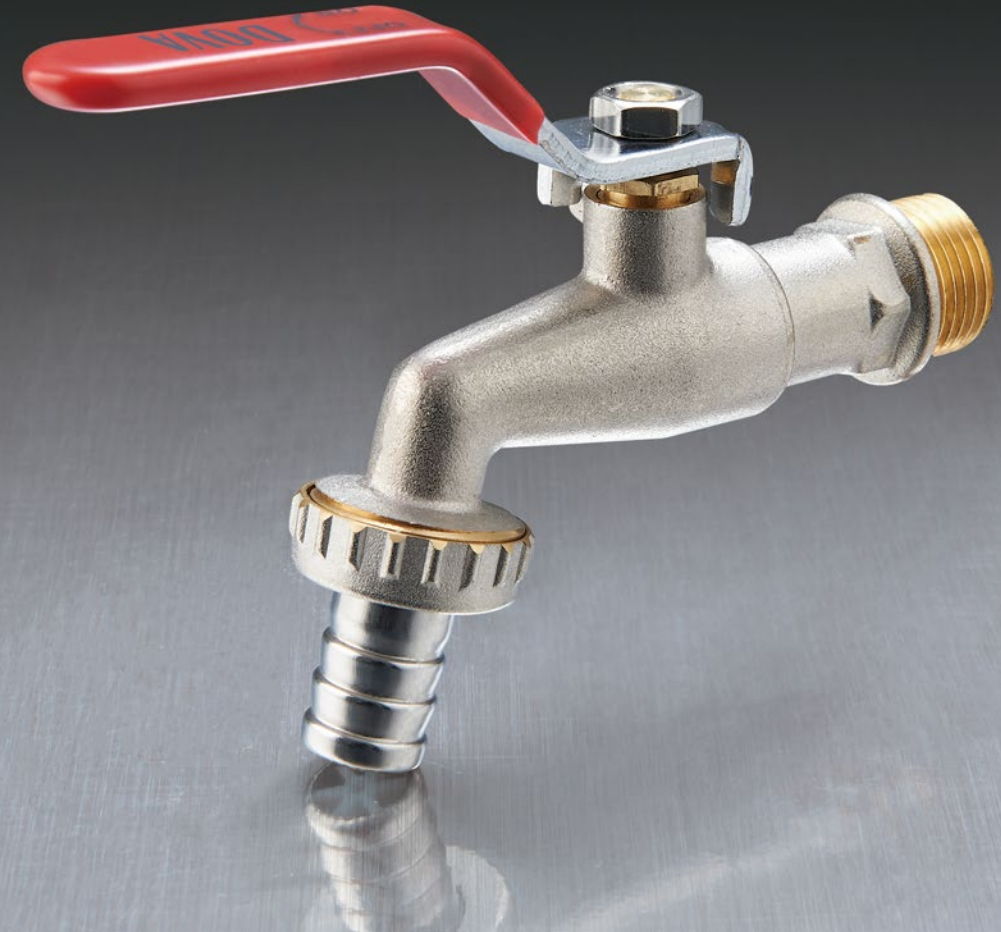

JL-B2008

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 110^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

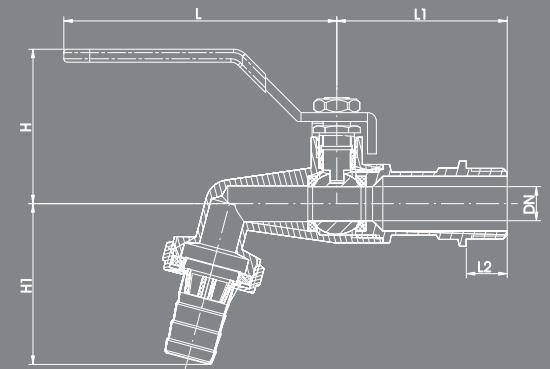

JL-B2008


SIZE	DN	L	L1	L2	H	H1
1/2"	10	83	50	12	45.5	46.5
3/4"	13.5	95	59.5	13	48.5	49.5
1"	14.5	116	66	17	51	58.5



JL-B2009

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 110^{\circ}\text{C}$
- ◇ Maximum working pressure: 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

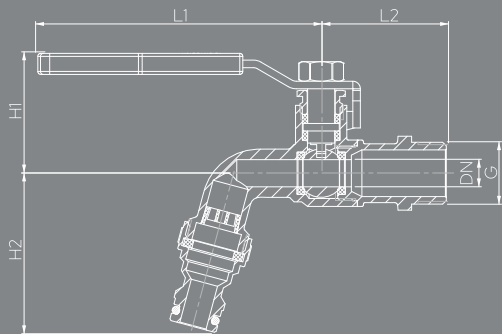


JL-2009

G	DN	L1	L2	H1	H2
1/2"	9	94	41.5	39.5	52
3/4"	11.5	94	46	41	54
1"	14.5	94	58	42	54

JL-B2018

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

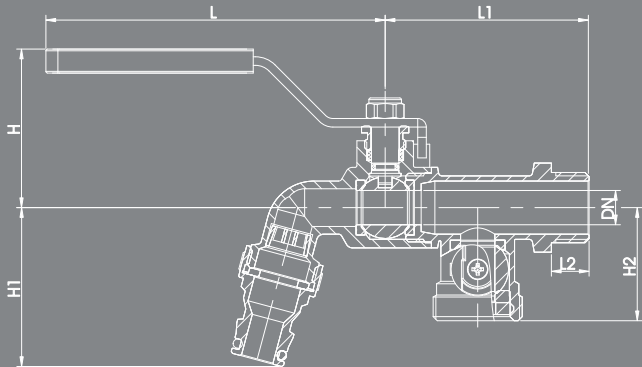

JL-B2018


SIZE	DN	L	L1	L2	H	H1	H2
1/2"	10	99	59.5	11	46	46	33



JL-B2026

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 110^{\circ}\text{C}$
- ◇ Maximum working pressure: 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

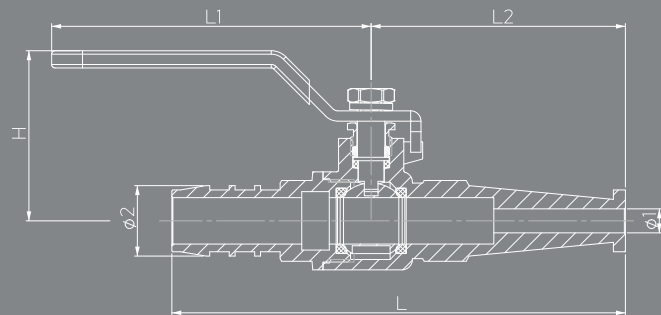


JL-2026

Ø1	Ø2	L1	L2	L	H
7	20.5	93	74	132	49.5
7	25.5	93	74	128	49.5

JL-B2030


TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

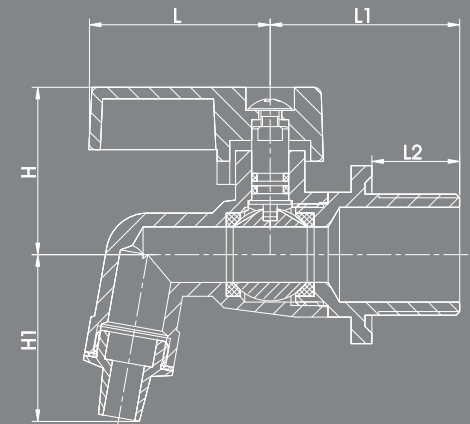

JL-B2030


SIZE	DN	L	L1	L2	H	H1
3/8"	9	40	34.5	15	33	33
1/2"	9	40	39.5	19	33	33
3/4"	12	40	41	19	36	38
1"	12	40	42.5	20	36	38

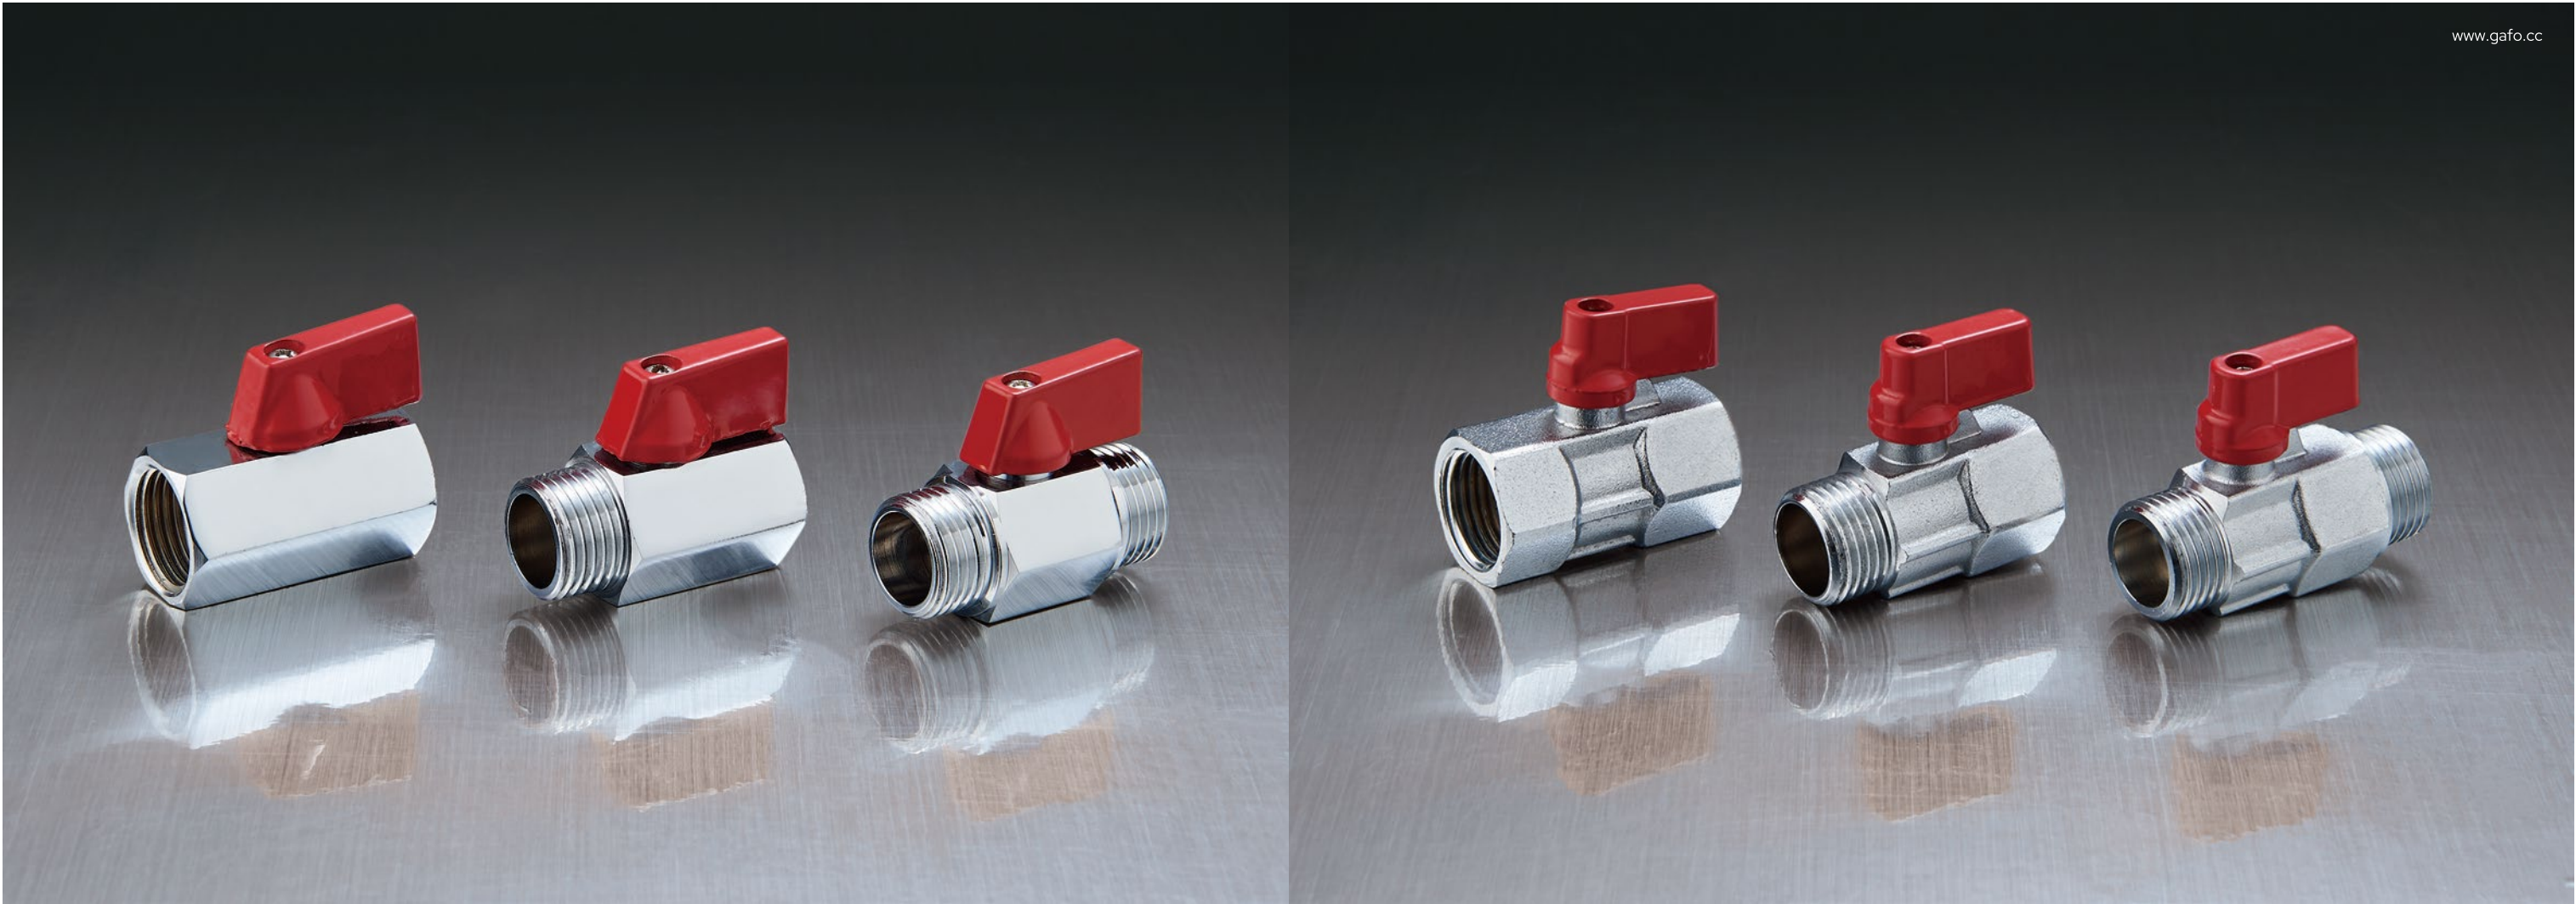


JL-B5001 JL-B5002 JL-B5005
TECHNICAL PARAMETER

- ◇ Medium temperature: -20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid


JL-B5001



JL-B5002



JL-B5005



JL-B5001						
SIZE	DN	L	L1	L2	H	
1/4"	8	41	10	22	29.7	
3/8"	8	41	10	22	29.7	
1/2"	10	44.5	10.5	22	31	
3/4"	13.5	49.5	11	22	34	


JL-B5002						
SIZE	DN	L	L1	L2	H	
1/4"	8	41.5	9	22	29.7	
3/8"	8	42	10	22	29.7	
1/2"	10	45	10.5	22	31	
3/4"	13.5	49.5	11	22	34	

JL-B5005						
SIZE	DN	L	L1	L2	H	
1/4"	8	43.5	9	22	29.7	
3/8"	8	45	10	22	29.7	
1/2"	10	49	10.5	22	31	
3/4"	13.5	54	11	22	34	

JL-B5011 JL-B5012 JL-B5015
TECHNICAL PARAMETER


- ◇ Medium temperature: -20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

JL-B5011




JL-B5011						
SIZE	DN	L	L1	L2	H	
1/2"	10	55.5	11	23	32.5	

JL-B5012




JL-B5012						
SIZE	DN	L	L1	L2	H	
1/4"	8	41.5	11	23	29	
3/8"	8	41.5	11	23	29	
1/2"	10	45.5	12	23	32.5	
3/4"	13.5	51	14	23	34.5	

JL-B5015




JL-B5015						
SIZE	DN	L	L1	L2	H	
1/4"	8	39.5	10	23	29	
3/8"	8	40.5	11	23	29	
1/2"	10	46	12.5	23	32.5	
3/4"	13.5	50	13.5	23	34.5	

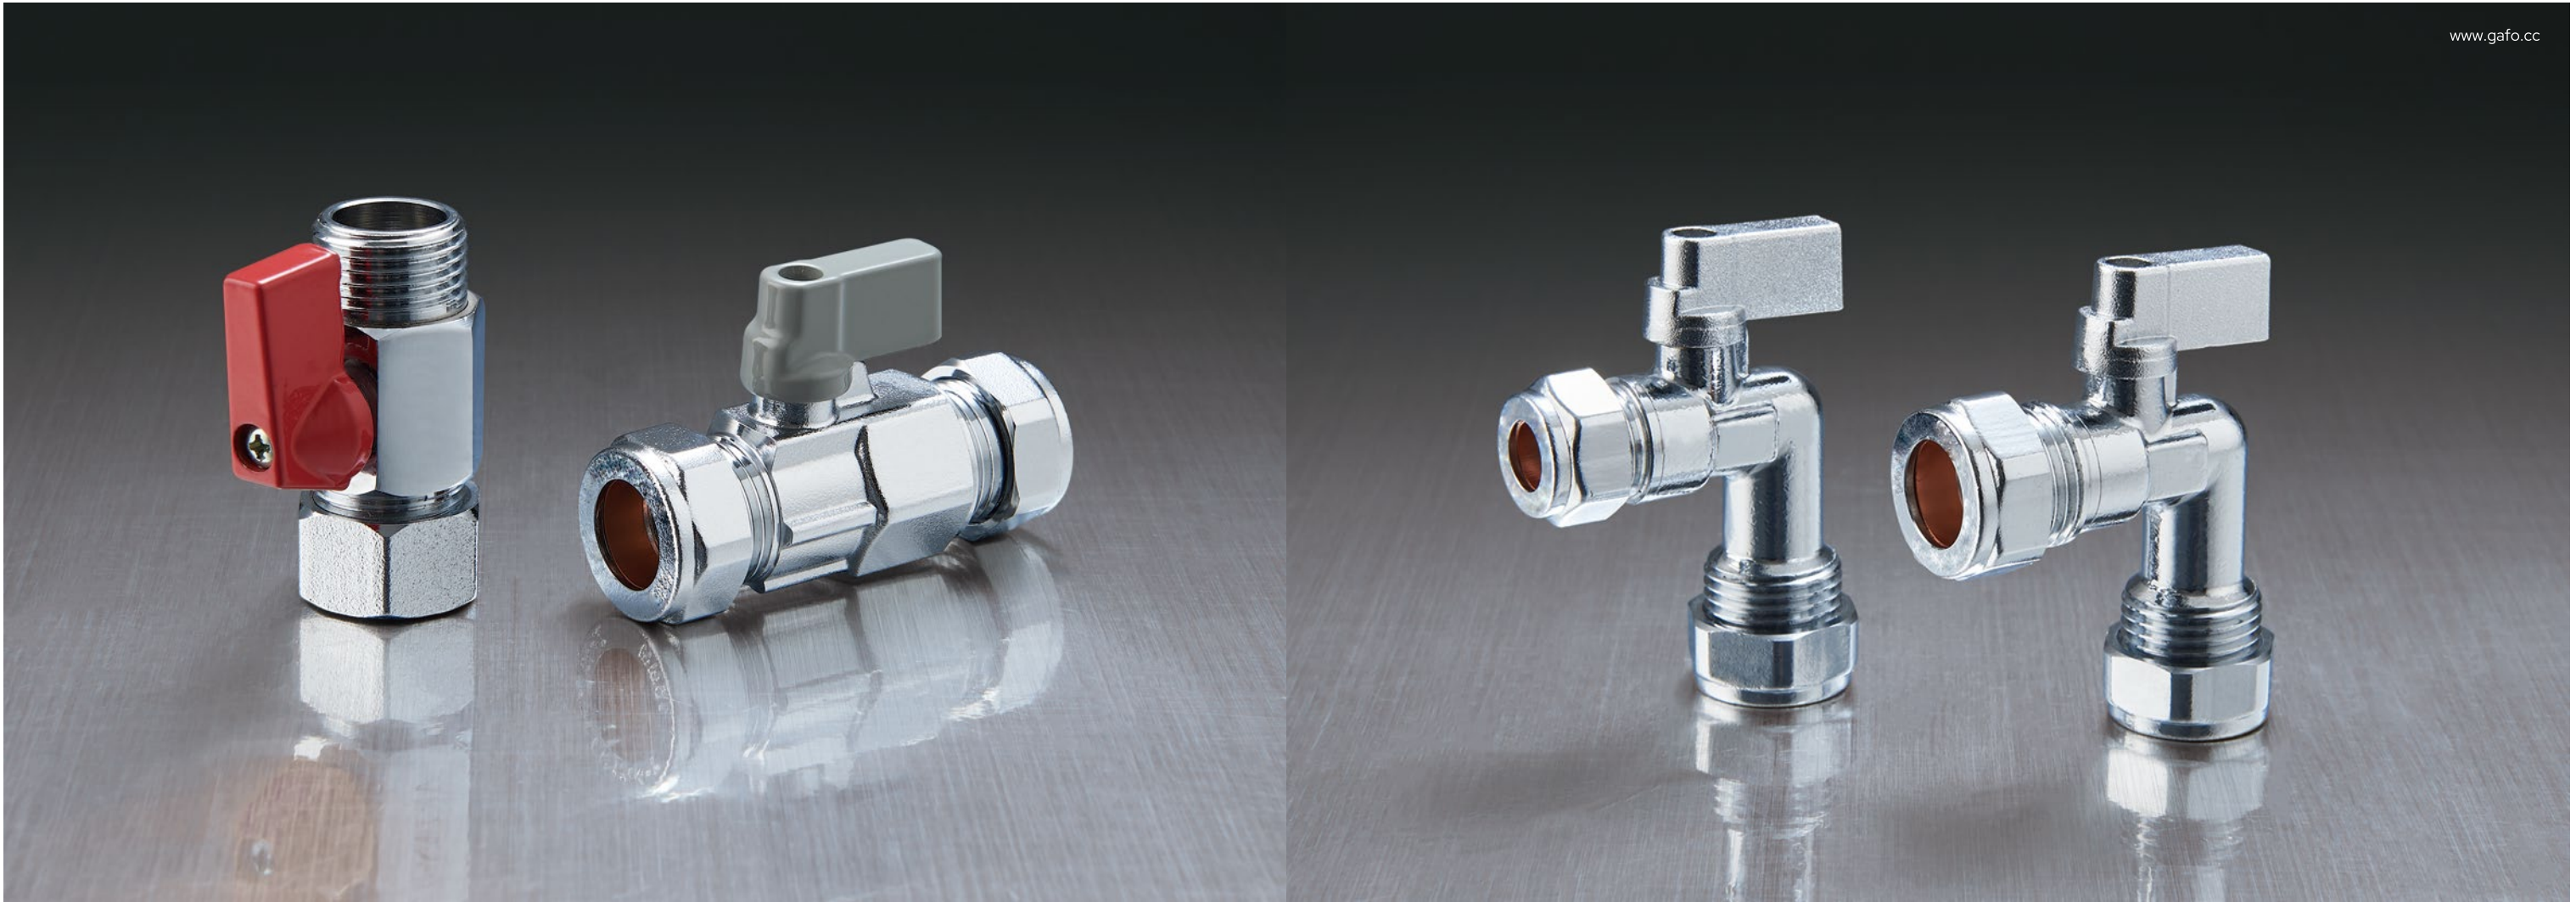


JL-B5025 JL-B5035
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B5025



JL-B5035



JL-B5025


SIZE	DN	L	L1	L2	H
1/2"	8	53	23	Ø16	30
3/4"	13.5	57	23	Ø20	32.5

JL-B5035

SIZE	DN	L	L1	L2	H
1/2"	10	69	23	Ø15	32.5

JL-B5045
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤100℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:water,non-corrosive liquid

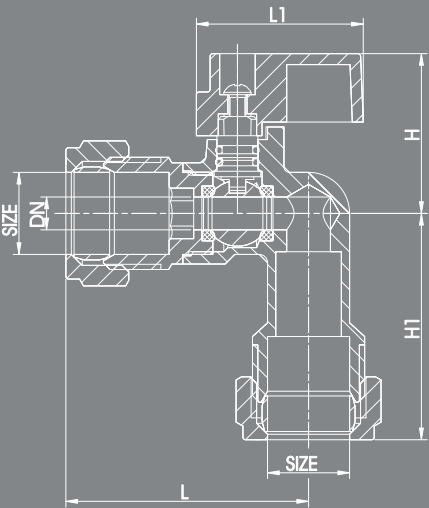

JL-B5045


SIZE	DN	L	L1	H	H1
Ø15*Ø10	6	40.5	30.5	29	41.5
Ø15*Ø15	6	44.5	30.5	29	41.5




JL-B5051 JL-B5052
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤110℃
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium:water,non-corrosive liquid

JL-B5051



JL-B5052



JL-B5051

SIZE	DN	L	L1	L2	H
3/8"	9	63.5	10.5	21.5	32
1/2"	9	63.5	10.5	21.5	32
3/4"	9	64.5	12	21.5	32


JL-B5052

SIZE	DN	L	L1	L2	H
1/2"	9	73	14.5	23	32


JL-B6005 JL-B6002 JL-B6001
TECHNICAL PARAMETER

- ◇ Medium temperature:-20℃≤t≤100℃
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium:water,non-corrosive liquid


JL-B6005



JL-B6002



JL-B6001



JL-B6005

SIZE	DN	L	L1	H
1/2"	31.5	16	48.5	11
3/4"	35.5	21	55	12.5
1"	43.5	26	61	13.5
1 1/4"	56	32	67	14.5
1 1/2"	63	38.5	71	16
2"	78	53	79.5	17

JL-B6002

SIZE	DN	L	L1	L2
1/2"	33.2	18	65	10.5
3/4"	41.5	24	76	11
1"	47	29	85	11.5
1 1/4"	59.2	38	101	12.5
1 1/2"	67.6	44	117	12.5
2"	81	56	137	15
2 1/2"	102.5	68	155	18.5
3"	110	78	163	20
4"	140	98	183	22

JL-B6001


SIZE	DN	L	L1	L2	H
1/2"	33.2	17	45	10.5	10.5
3/4"	41.5	23	49	11	11
1"	47	29	55	11.5	11.5
1 1/4"	59.2	38	61.5	12.5	12.5
1 1/2"	67.6	43	68.5	12.5	12.5
2"	81	55	75.5	15	15
2 1/2"	102.5	68	93	18.5	18.5
3"	110	78	97	20	20
4"	140	100	100	22	22



JL-B6007

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 100^{\circ}\text{C}$
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

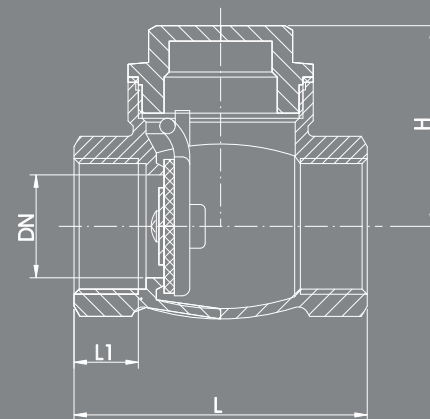


JL-B6007

SIZE	DN	L	L1	H
1/2"	14	49	11.5	36
3/4"	20	57	12.5	39
1"	24	68	14.5	45
1 1/4"	31	76	16.5	53
1 1/2"	37	86	18.5	59.5
2"	46	100	18.5	66.5
2 1/2"	53	105	19	76.5
3"	64	124	20	81.5
4"	74	160	25	97

JL-B7001

TECHNICAL PARAMETER

- ◇ Medium temperature: $-20^{\circ}\text{C} \leq t \leq 110^{\circ}\text{C}$
- ◇ Maximum working pressure : 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

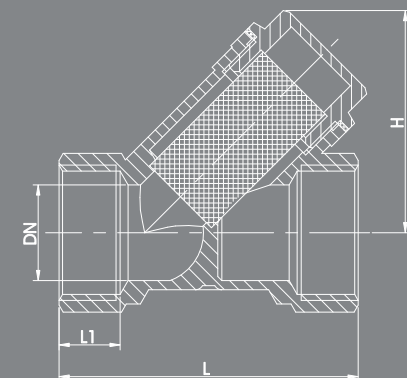

JL-B7001

SIZE	DN	L	L1	H
1/2	16	56	11	40
3/4	20	67	12	47.5
1	24.5	72	14.5	54
1 1/4	34	85	14.5	64
1 1/2	41.5	96	16	73.5
2	48	113	16	91
2 1/2	65	134.5	19	148
3	77	156	19.5	172
4	97	181.5	25.5	213.5




JL-B3360 JI-B3361


TECHNICAL PARAMETER

- ◇ Medium temperature: -20°C≤t≤110°C
- ◇ Maximum working pressure: 2Mpa(20bar)
- ◇ Working medium: water, non-corrosive liquid

JL-3360



JL-3361

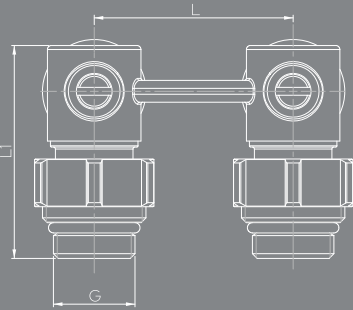


JL-3360

G	G2	L1	L
1/2"	3/4"	64	50

JL-3361


G	G2	L1	L	H
1/2"	3/4"	53.5	50	22



JL-B7040

TECHNICAL PARAMETER

- ◇ Medium temperature: -20°C≤t≤110°C
- ◇ Maximum working pressure : 1Mpa(10bar)
- ◇ Working medium: water, non-corrosive liquid

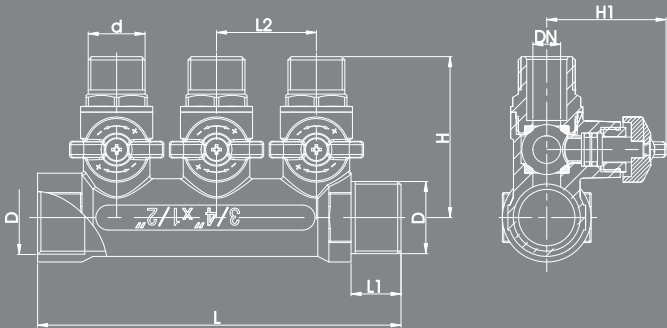

JL-B7040

SIZE	D	d	DN	L	L1	L2	H	H1
3/4"×1/2"-2	3/4"	1/2"	10	94.5	18	36	58	43
3/4"×1/2"-3	3/4"	1/2"	10	131	18	36	58	43
1"×1/2"-2	1"	1/2"	10	103	19.5	36	60	43
1"×1/2"-3	1"	1/2"	10	138	19.5	36	60	43

